


Uponor Aqua Pipe natural PN10 20x2,8 50m

1001201

- Material: PE-Xa
- Operating pressure 10 bar
- In coils

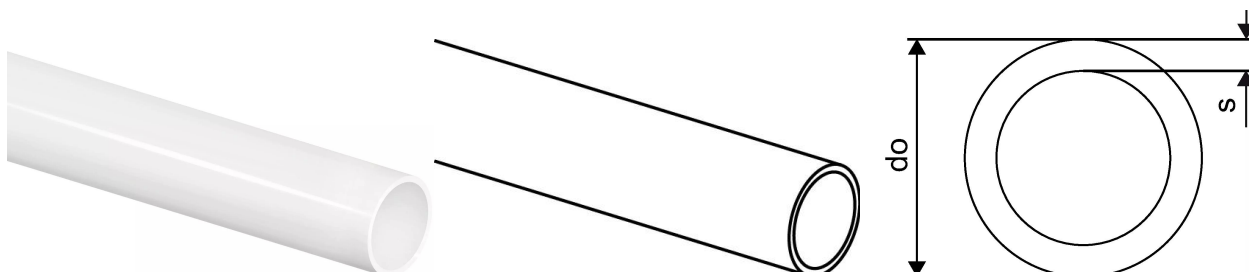

Application information Uponor Aqua Pipe natural PN10

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN10 20x2,8 50m

1001201



Product code

Item no EAN	7321500018238
Item no GF	35001001201
Item no GTIN	07321500018238
Item no LVI	2022337

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,154
Item Unit Width	20
Item_UOM	m

Measurements

Outer Diameter_do	20
Wall thickness_s	2,8

Packaging

Packaging GTIN PL1	06414905250646
Packaging GTIN PL4	06414905250660
Packaging Height PL1	100
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	550
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,06084
Packaging Volume PL4	0,912
Packaging Weight PL1	7,777

Packaging Weight PL4	110,7
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com