Product data sheet



GF Uponor MLC bevelling tool 16

1006830

- For bevelling the Uponor Uni Pipe PLUS and MLC pipes.
- Supplied with manual toggle. Without manual toggle to be used as attachment for self-driving screw with tapping screw thread.



Application information GF Uponor MLC bevelling tool

Specification


- Oxygen diffusion resistant multi-layer composite pipe(PE-RT - adhesive - longitudinally welded aluminium - adhesive - PE-RT)
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

GF Uponor MLC bevelling tool 16

1006830

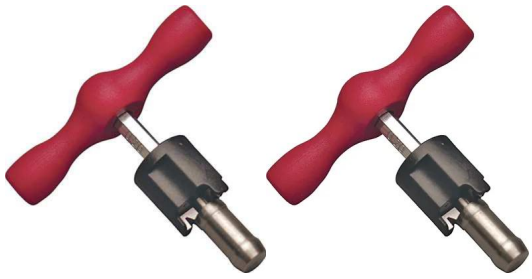

Product code

Item no EAN	4021598303003
Item no GF	35001006830
Item no GTIN	04021598303003
Item no LVI	1725985
Item no NOBB	41942112
Item no NRF	5071819
Item no RSK	1873308
Item no VVS	045498516

Dimensions

Item Unit Height	11
Item Unit Length	11
Item Unit Weight	0,12
Item Unit Width	25
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905433360
Packaging GTIN PL3	06414905444717
Packaging Height PL1	30
Packaging Height PL3	280
Packaging Length PL1	130
Packaging Length PL3	340
Packaging Material (number) PL1	4
Packaging Material (number) PL3	20
Packaging Material PL1	Low density polyethylene
Packaging Material PL3	Corrugated fibreboard

Packaging Material (short) PL1	LDPE
Packaging Material (short) PL3	PAP
Packaging Quantity PL1	1
Packaging Quantity PL3	50
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,000468
Packaging Volume PL3	0,024752
Packaging Weight PL1	0,123
Packaging Weight PL3	6,417
Packaging Width PL1	120
Packaging Width PL3	260

Technical data

Recycling Text Block PL1	Low density polyethylene
Recycling Text Block PL3	Corrugated fibreboard

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+