
Product data sheet



GF Uponor Radi Pipe natural PN6 S 110x10,0 6m

1008879

- Operating pressure 6 bar
- 6 m bars

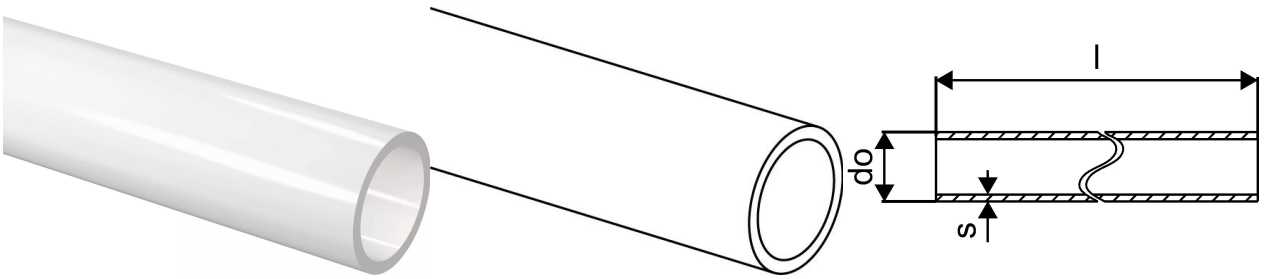

Application information GF Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

GF Uponor Radi Pipe natural PN6 S 110x10,0 6m

1008879

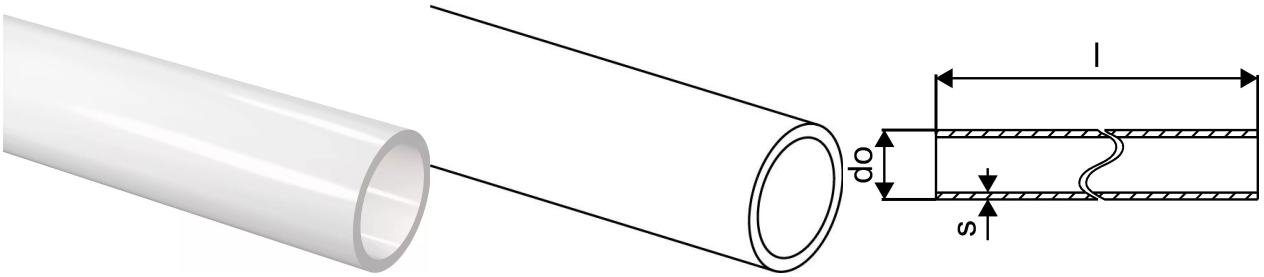

Product code

Item no EAN	7321500033729
Item no GF	35001008879
Item no GTIN	07321500033729

Dimensions

Item Unit Height	110
Item Unit Length	1000
Item Unit Weight	3,095
Item Unit Width	110
Item_UOM	m

Measurements

Outer Diameter_do	110
Wall thickness_s	10,0

Packaging

Packaging GTIN PL1	06414905421978
Packaging Height PL1	112
Packaging Length PL1	6000
Packaging Quantity PL1	6
Packaging Type PL1	Piece
Packaging Volume PL1	0,075264
Packaging Weight PL1	18,57
Packaging Width PL1	112

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+