
Product data sheet



GF Uponor Radi Pipe natural PN6 S 40x3,7 6m

1008939

- Operating pressure 6 bar
- 6 m bars

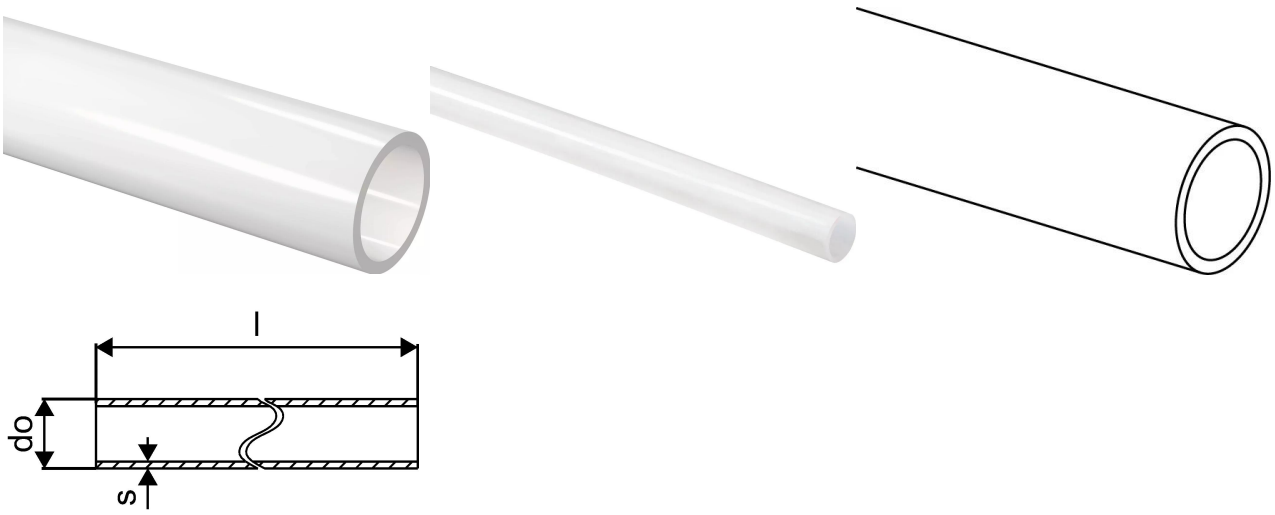

Application information GF Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

GF Uponor Radi Pipe natural PN6 S 40x3,7 6m

1008939

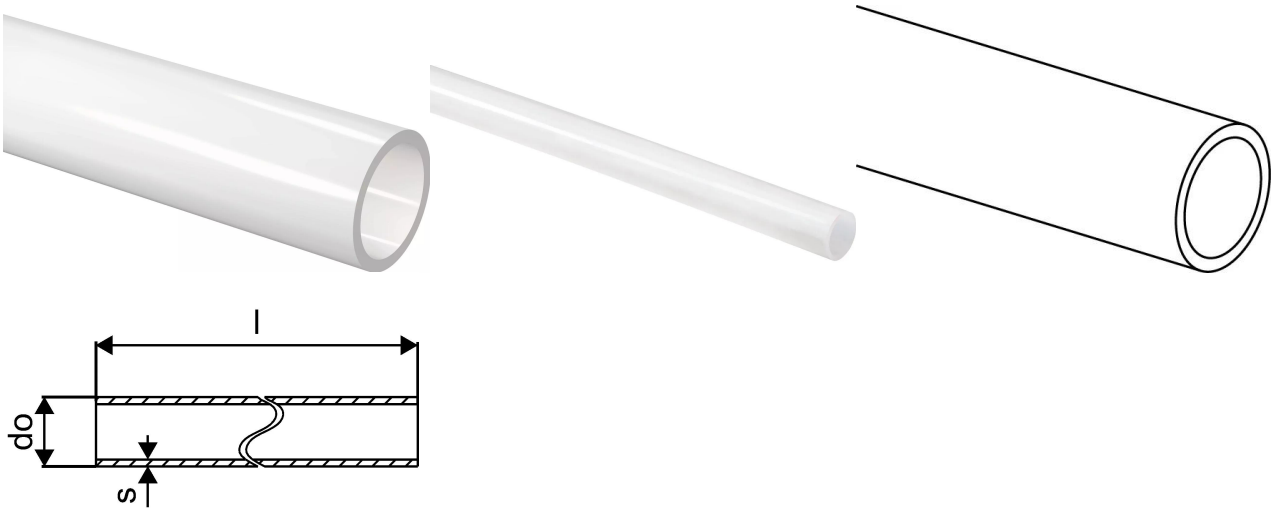

Product code

Item no EAN	7321500018061
Item no GF	35001008939
Item no GTIN	07321500018061
Item no NRF	8362379
Item no RSK	2418232
Item no VVS	087229140

Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,437
Item Unit Width	40
Item_UOM	m

Measurements

Outer Diameter_do	40
Wall thickness_s	3,7

Packaging

Packaging GTIN PL1	06414905422012
Packaging GTIN PL4	06414905662852
Packaging Height PL1	40

Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	840
Packaging Type PL1	Plastic_Bag
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,0096
Packaging Volume PL4	2,7755
Packaging Weight PL1	2,672
Packaging Weight PL4	399,08
Packaging Width PL1	40
Packaging Width PL4	650

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+