


## Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

- Operating pressure 6 bar
- 6 m bars

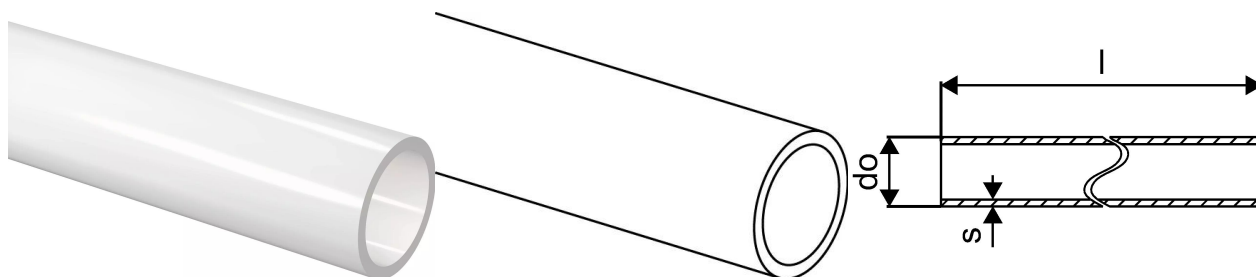

### Application information Uponor Radi Pipe natural PN6 S

#### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941



### Product code

Item no EAN	7321500018085
Item no GF	35001008941
Item no GTIN	07321500018085
Item no RSK	2418235
Item no VVS	087229163

### Dimensions

Item Unit Height	63
Item Unit Length	1000
Item Unit Weight	1,065
Item Unit Width	63
Item_UOM	m

### Measurements

Outer Diameter_do	63
Wall thickness_s	5,8

### Packaging

Packaging GTIN PL1	06414905422036
Packaging GTIN PL4	06414905662876
Packaging Height PL1	65
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	420
Packaging Type PL1	Piece
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,02535
Packaging Volume PL4	2,7755

Packaging Weight PL1	6,288
Packaging Weight PL4	250
Packaging Width PL1	65
Packaging Width PL4	650

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)