


## Uponor Aqua Pipe natural PN10 40x5,5 50m

1008963

- Material: PE-Xa
- Operating pressure 10 bar
- In coils

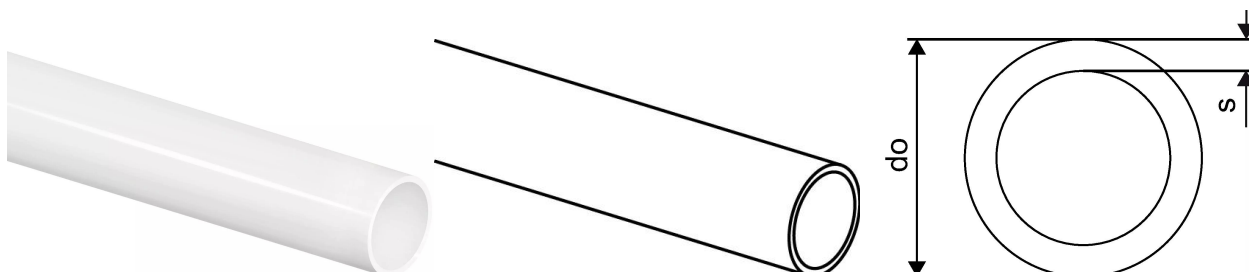

### Application information Uponor Aqua Pipe natural PN10

#### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural PN10 40x5,5 50m

1008963



### Product code

Item no EAN	7321500022884
Item no GF	35001008963
Item no GTIN	07321500022884
Item no LVI	2012540
Item no NOBB	41942861
Item no NRF	5110026
Item no RSK	2418001
Item no VVS	087210040

### Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,602
Item Unit Width	40
Item_UOM	m

### Measurements

Outer Diameter_do	40
Wall thickness_s	5,5

### Packaging

Packaging GTIN PL1	06414905255740
Packaging GTIN PL4	06414905255757
Packaging Height PL1	250
Packaging Height PL4	1850
Packaging Length PL1	950
Packaging Length PL4	950
Packaging Quantity PL1	50
Packaging Quantity PL4	350
Packaging Type PL1	Coil

Packaging Type PL4	Pallet
Packaging Volume PL1	0,225625
Packaging Volume PL4	1,669625
Packaging Weight PL1	30,7
Packaging Weight PL4	225
Packaging Width PL1	950
Packaging Width PL4	950

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)