
Product data sheet



GF Uponor Radi Pipe natural PN6 63X5,8 50m

1008981

- Operating pressure 6 bar
- Coil

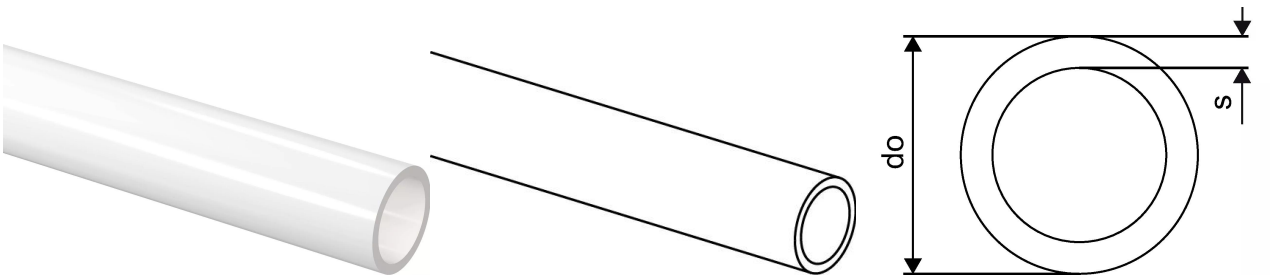

Application information GF Uponor Radi Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

GF Uponor Radi Pipe natural PN6 63X5,8 50m

1008981

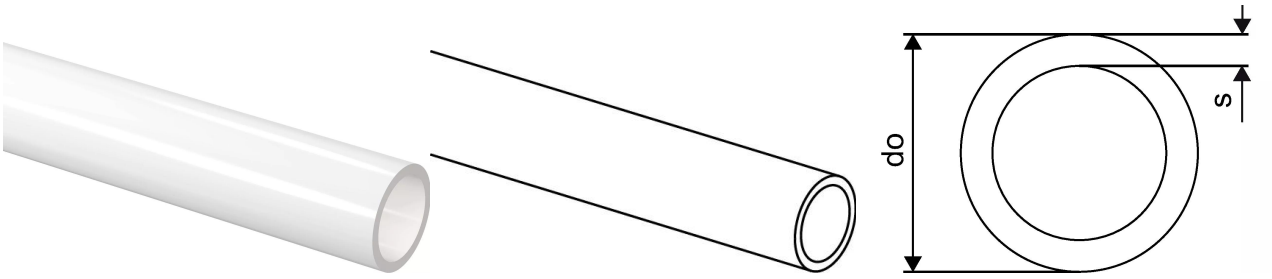

Product code

Item no EAN	7321500018498
Item no GF	35001008981
Item no GTIN	07321500018498
Item no LVI	2012165
Item no NOBB	41947152
Item no NRF	8362324
Item no RSK	2418025
Item no VVS	89523063

Dimensions

Item Unit Height	60
Item Unit Length	1000
Item Unit Weight	1,065
Item Unit Width	60
Item_UOM	m

Measurements

Outer Diameter_do	63
Wall thickness_s	5,8

Packaging

Packaging GTIN PL1	06414905255863
Packaging Height PL1	250
Packaging Length PL1	1790
Packaging Quantity PL1	50
Packaging Type PL1	Coil
Packaging Volume PL1	0,801025
Packaging Weight PL1	55,8

Packaging Width PL1	1790

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+