


Uponor Aqua Pipe natural in conduit black 16x2,2 25/20 50m

1008993

- Material: PE-Xa
- Operating pressure 10 bar
- In coils
- Pipe in conduit

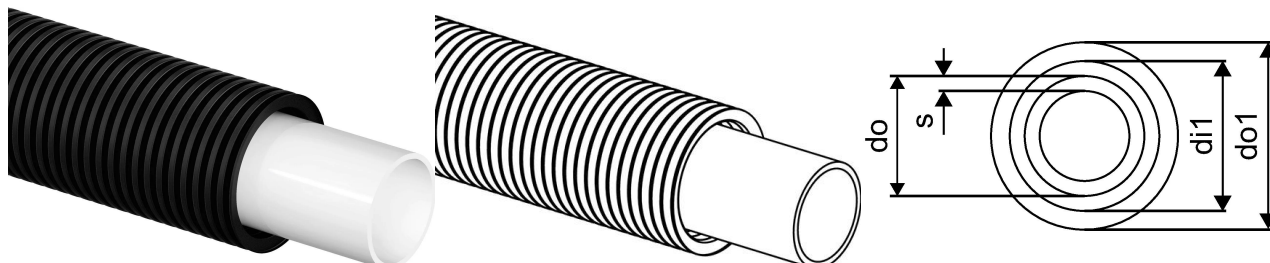

Application information Uponor Aqua Pipe natural in conduit black

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural in conduit black 16x2,2 25/20 50m

1008993

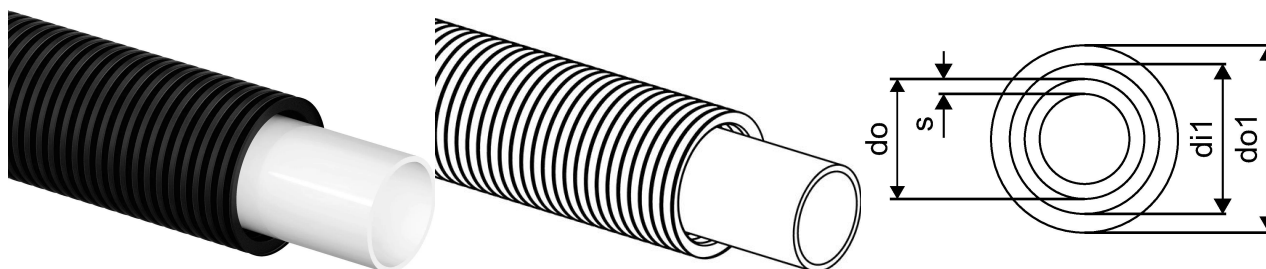

Measurements

Inner_diameter_di1	20
Outer Diameter_do	16
Outer Diameter_do1	25
Wall thickness_s	2,2

Product code

Item no EAN	7321500018627
Item no GF	35001008993
Item no GTIN	07321500018627

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,162
Item Unit Width	25
Item_UOM	m

Packaging

Packaging GTIN PL3	06414905255924
Packaging GTIN PL4	06414905255931
Packaging Height PL3	780
Packaging Height PL4	950
Packaging Length PL3	780
Packaging Length PL4	1200
Packaging Quantity PL3	50
Packaging Quantity PL4	550
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,06084
Packaging Volume PL4	0,912

Packaging Weight PL3	8,5
Packaging Weight PL4	115,5
Packaging Width PL3	100
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com