


Uponor Aqua Pipe natural in conduit black 20x2,8 28/23 50m

1008994

- Material: PE-Xa
- Operating pressure 10 bar
- In coils
- Pipe in conduit

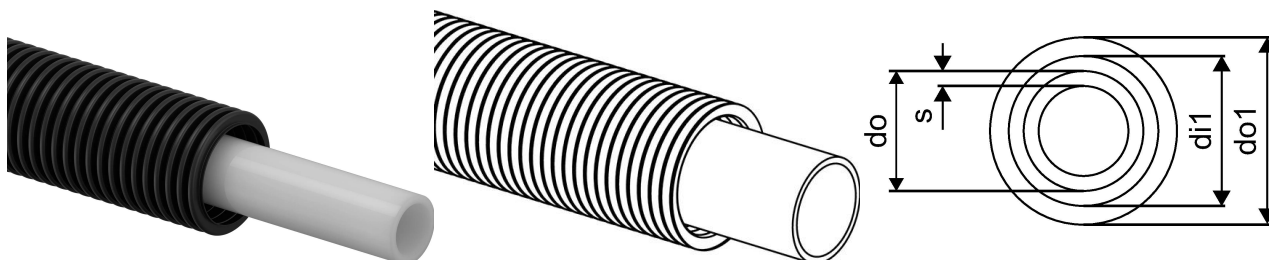

Application information Uponor Aqua Pipe natural in conduit black

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural in conduit black 20x2,8 28/23 50m

1008994

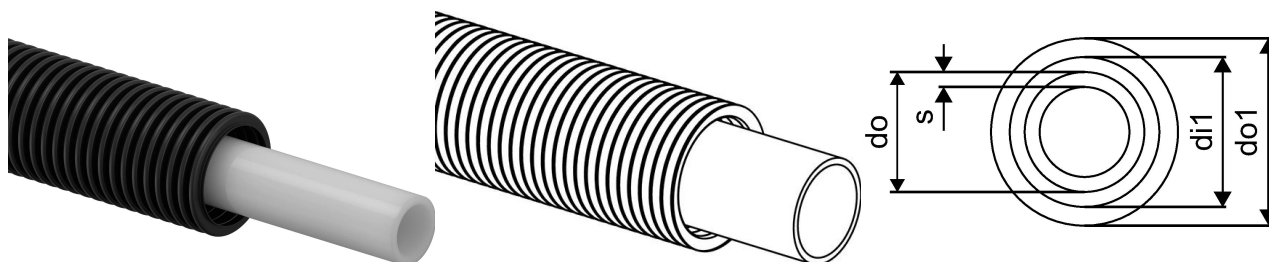

Measurements

Inner_diameter_di1	23
Outer Diameter_do	20
Outer Diameter_do1	28
Wall thickness_s	2,8

Product code

Item no EAN	7321500018634
Item no GF	35001008994
Item no GTIN	07321500018634

Dimensions

Item Unit Height	28
Item Unit Length	1000
Item Unit Weight	0,244
Item Unit Width	28
Item_UOM	m

Packaging

Packaging GTIN PL3	06414905255948
Packaging GTIN PL4	06414905255955
Packaging Height PL3	780
Packaging Height PL4	950
Packaging Length PL3	780
Packaging Length PL4	1200
Packaging Quantity PL3	50
Packaging Quantity PL4	400
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,0803088
Packaging Volume PL4	0,912

Packaging Weight PL3	12,322
Packaging Weight PL4	123,576
Packaging Width PL3	132
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com