
Product data sheet



GF Uponor Teck conduit, black 25/20 50m

1012860

- corrugated conduit
- colour: black

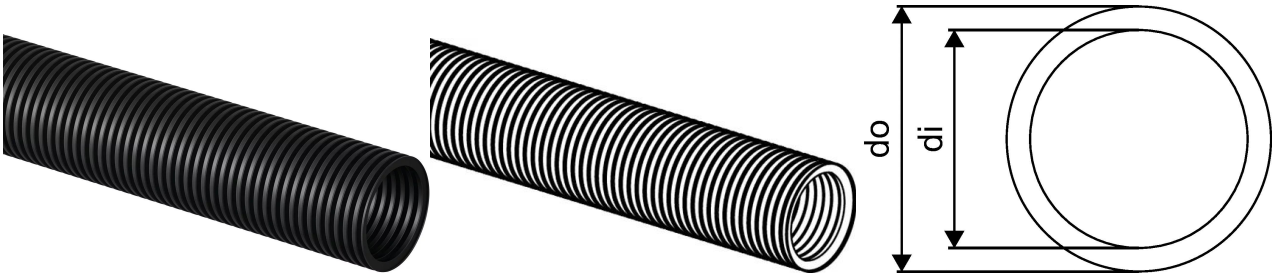

Application information GF Uponor Teck conduit, black

Specification


- Corrugated, made of high density polyethylene (HDPE)
- Fire classification E according to EN 13501-1
- Supplied in coils.

Application

- Used for pipe in pipe (PIP) installations to reduce the risk for water damages and allow for flexible media pipe to be replaced

GF Uponor Teck conduit, black 25/20 50m

1012860

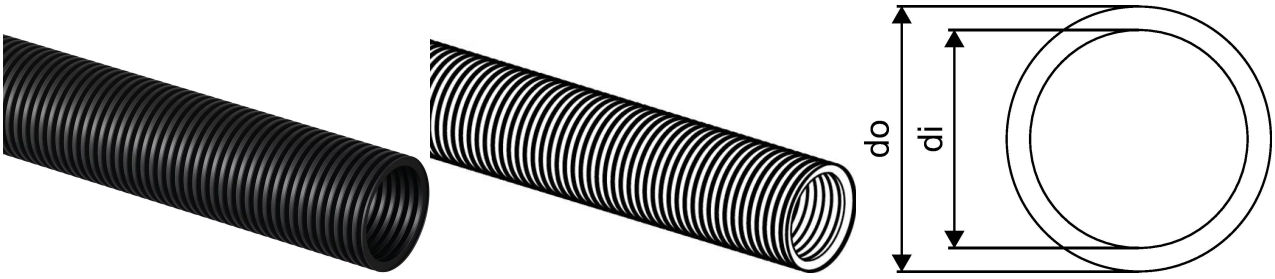

Measurements

Inner_diameter_di	20
Outer Diameter_do	25

Product code

Item no EAN	4021598018211
Item no GF	35001012860
Item no GTIN	04021598018211

Dimensions

Item Unit Height	25.1
Item Unit Length	1000
Item Unit Weight	0,066
Item Unit Width	25.1
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905434824
Packaging GTIN PL4	06414905488377
Packaging Height PL1	165
Packaging Height PL4	2250
Packaging Length PL1	560
Packaging Length PL4	1130
Packaging Quantity PL1	50
Packaging Quantity PL4	2500
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,051744
Packaging Volume PL4	2,873025

Packaging Weight PL1	3,3
Packaging Weight PL4	177
Packaging Width PL1	560
Packaging Width PL4	1130

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+