


GF Uponor Ecoflex Aqua Pipe Single 25x3,5/140

1018117

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing

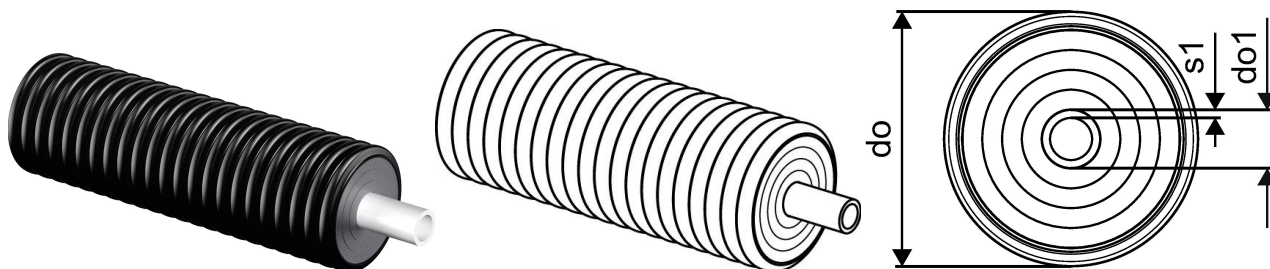

Application information GF Uponor Ecoflex Aqua Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

GF Uponor Ecoflex Aqua Pipe Single 25x3,5/140

1018117

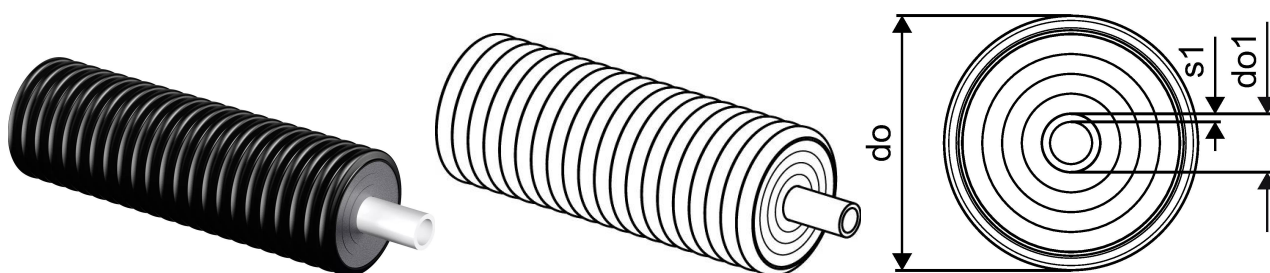**Measurements**

Bending radius M	0,35
Outer Diameter_do	140
Outer Diameter_do1	25
Wall thickness_s1	3,5

Product code

Item no EAN	4021598111714
Item no GF	35001018117
Item no GTIN	04021598111714
Item no LVI	3010111
Item no NRF	8360871
Item no RSK	2266158
Item no VVS	087318025

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,24
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437191
Packaging Height PL1	2200
Packaging Length PL1	1500
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	248
Packaging Width PL1	2200

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com