


Uponor Ecoflex Thermo Pipe mini 32x2,9/68

1018133

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

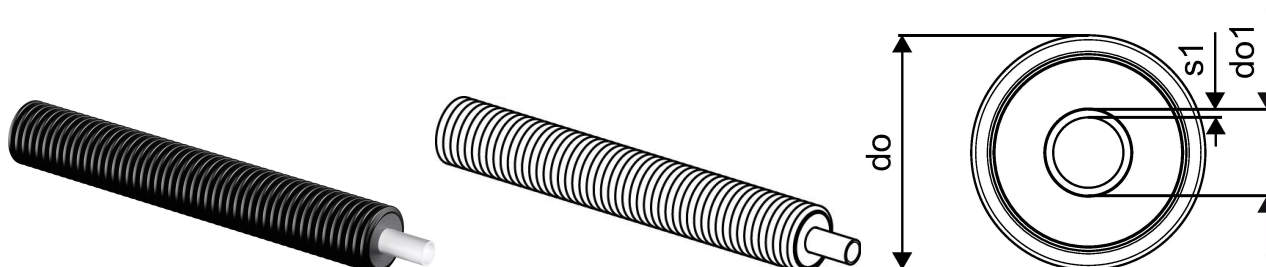

Application information Uponor Ecoflex Thermo Pipe mini

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Pipe mini 32x2,9/68

1018133

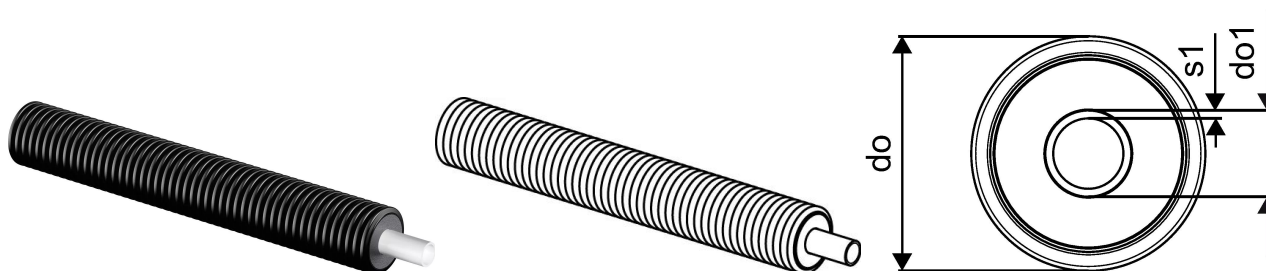

Measurements

Bending radius M	0,25
Outer Diameter_do	68
Outer Diameter_do1	32
Wall thickness_s1	2,9

Product code

Item no EAN	6414905203314
Item no GF	35001018133
Item no GTIN	06414905203314

Dimensions

Item Unit Height	68
Item Unit Length	1000
Item Unit Weight	0,55
Item Unit Width	68
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437351
Packaging Height PL1	1600
Packaging Length PL1	700
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	1,792
Packaging Weight PL1	110
Packaging Width PL1	1600

Documents

Page with all documents



com

her.