GF Uponor Ecoflex Thermo Pipe Twin 2x32x2,9/175

1018135

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

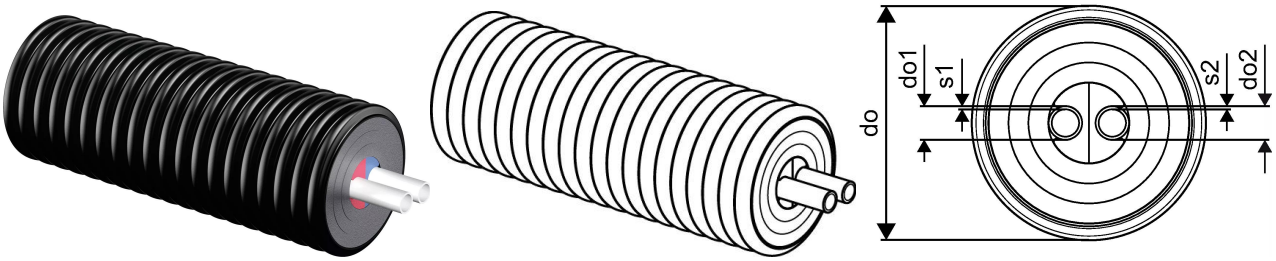

Application information GF Uponor Ecoflex Thermo Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

GF Uponor Ecoflex Thermo Pipe Twin 2x32x2,9/175

1018135

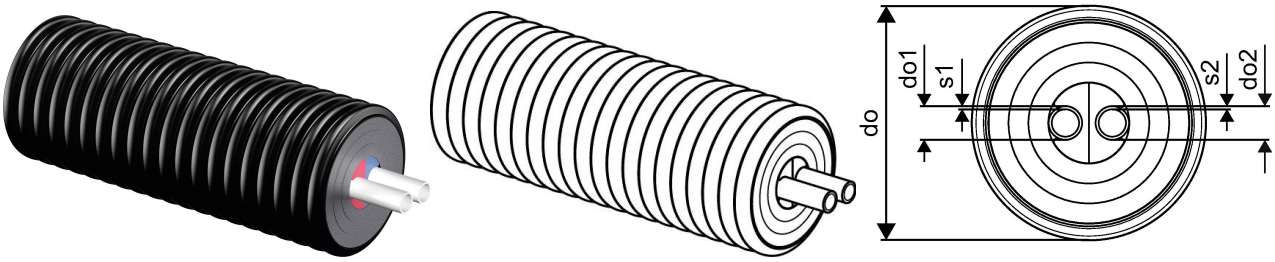

Measurements

Bending radius M	0,6
Outer Diameter_do	175
Outer Diameter_do1	32
Outer Diameter_do2	32
Wall thickness_s1	2,9
Wall thickness_s2	2,9

Product code

Item no EAN	6414905210350
Item no GF	35001018135
Item no GTIN	06414905210350
Item no LVI	3010233
Item no NOBB	41945237
Item no NRF	8360503
Item no RSK	2190562
Item no VVS	087809032

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	1,99
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437375
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil

Packaging Volume PL1	10,368
Packaging Weight PL1	398
Packaging Width PL1	2400

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com