


Uponor Ecoflex Aqua Pipe Twin 40x5,5-25x3,5/175

1018141

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

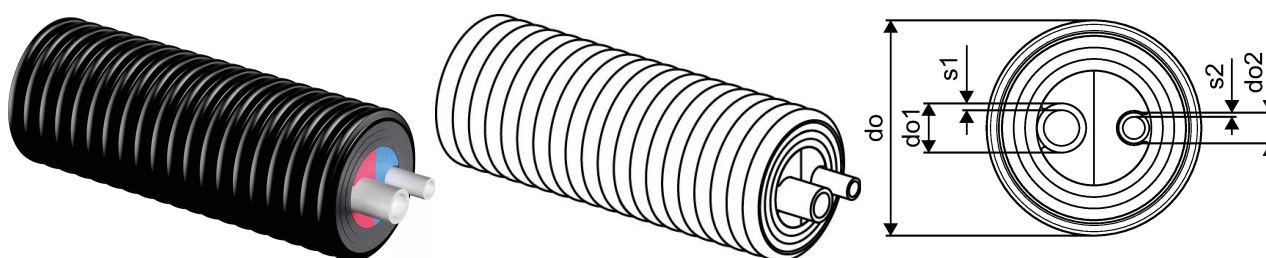

Application information Uponor Ecoflex Aqua Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Pipe Twin 40x5,5-25x3,5/175

1018141



Measurements

Bending radius M	0,9
Outer Diameter_do	175
Outer Diameter_do1	40
Outer Diameter_do2	25
Wall thickness_s1	5,5
Wall thickness_s2	3,5

Product code

Item no EAN	4021598111745
Item no GF	35001018141
Item no GTIN	04021598111745
Item no LVI	3010181
Item no NRF	8360874
Item no RSK	2266162
Item no VVS	087363440

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,45
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437436
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368

Packaging Weight PL1

490

Packaging Width PL1

2400

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

E
communications@georgfischer.
com