


## Uponor Ecoflex Varia Pipe Single 110x10,0 /175

1018237

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

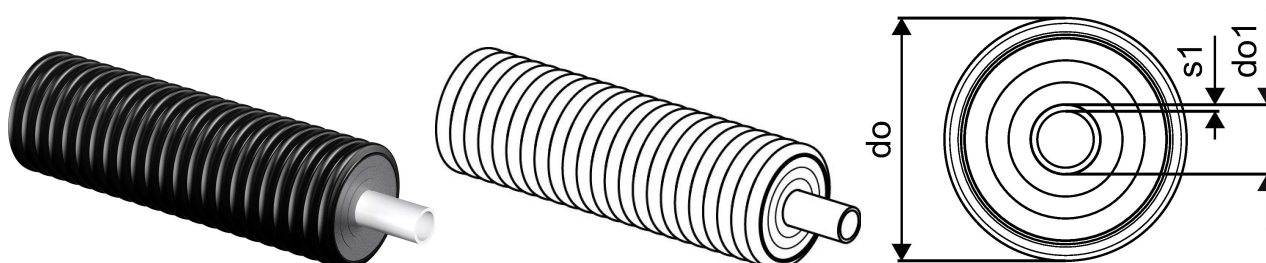

### Application information Uponor Ecoflex Varia Pipe Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Varia Pipe Single 110x10,0 /175

1018237

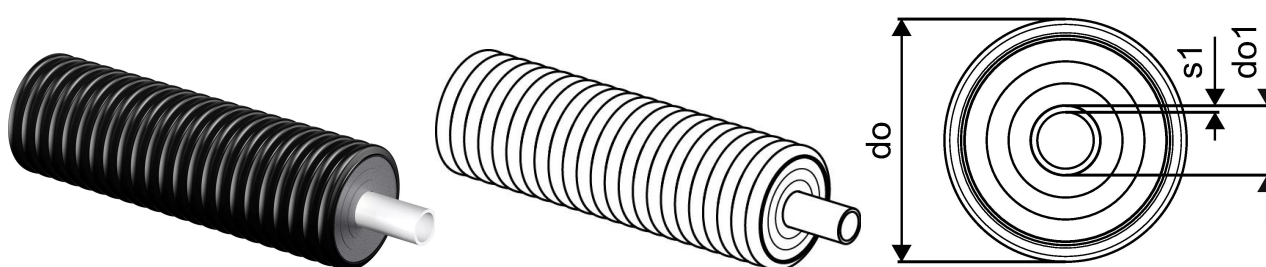

### Measurements

Bending radius M	0,9
Outer Diameter_do	175
Outer Diameter_do1	110
Wall thickness_s1	10

### Product code

Item no EAN	4021598112001
Item no GF	35001018237
Item no GTIN	04021598112001
Item no VVS	087807510

### Dimensions

Item Unit Height	110
Item Unit Length	1000
Item Unit Weight	4,14
Item Unit Width	110
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437689
Packaging Height PL1	2200
Packaging Length PL1	2000
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	9,68
Packaging Weight PL1	414
Packaging Width PL1	2200

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com