


GF Uponor Ecoflex Varia Pipe Twin 2x25x2,3/140

1018238

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

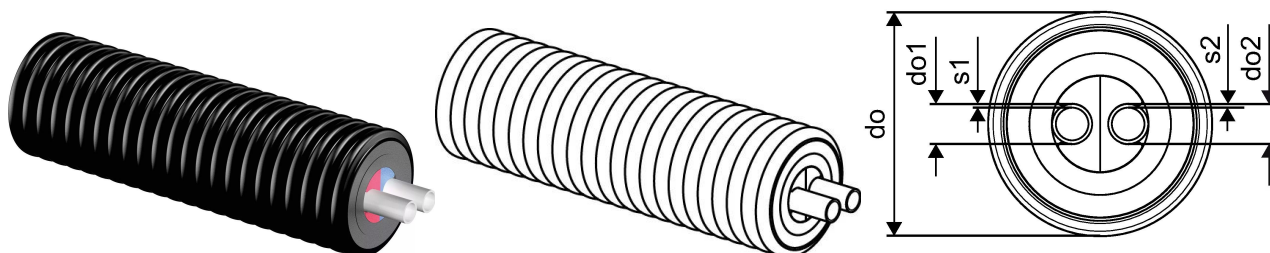

Application information GF Uponor Ecoflex Varia Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

NOTE:

Ecoflex Varia pipes listed in Ecoflex Thermo product line. Varia will be renamed as Thermo beginning of 2027

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

GF Uponor Ecoflex Varia Pipe Twin 2x25x2,3/140

1018238

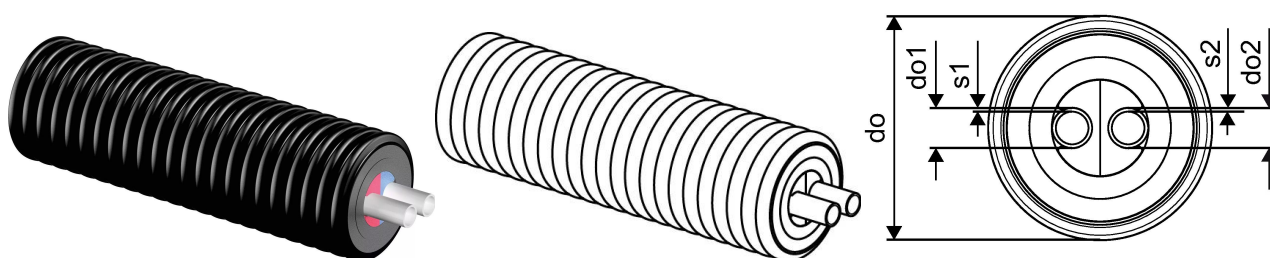**Measurements**

Bending radius M	0,4
Outer Diameter_do	140
Outer Diameter_do1	25
Outer Diameter_do2	25
Wall thickness_s1	2,3
Wall thickness_s2	2,3

Product code

Item no EAN	6414905210114
Item no GF	35001018238
Item no GTIN	06414905210114
Item no VVS	087809225

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,36
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437696
Packaging Height PL1	2200
Packaging Length PL1	1500
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	272
Packaging Width PL1	2200

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com