


Uponor Ecoflex Varia Pipe Twin 2x40x3,7/140

1018240

- Heating and Cooling
- Two medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

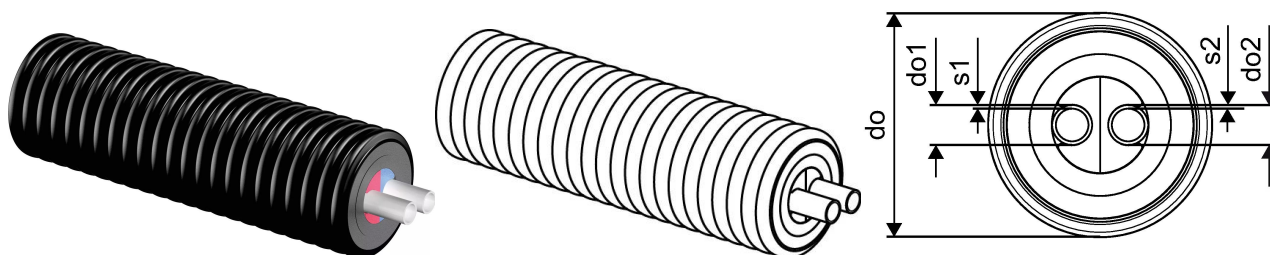

Application information Uponor Ecoflex Varia Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Varia Pipe Twin 2x40x3,7/140

1018240

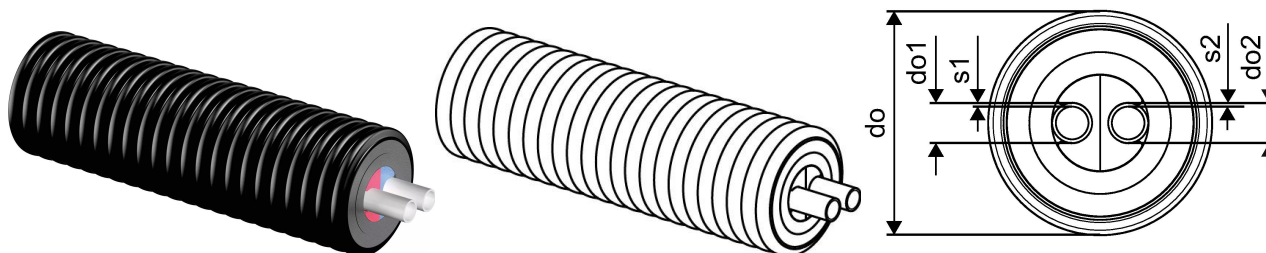

Measurements

Bending radius M	0,7
Outer Diameter_do	140
Outer Diameter_do1	40
Outer Diameter_do2	40
Wall thickness_s1	3,7
Wall thickness_s2	3,7

Product code

Item no EAN	6414905210619
Item no GF	35001018240
Item no GTIN	06414905210619
Item no VVS	087809240

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	2,08
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437719
Packaging Height PL1	2200
Packaging Length PL1	1500
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	416
Packaging Width PL1	2200

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com