


Uponor Aqua Pipe natural PN10 16x2,2 100m

1022682

- Material: PE-Xa
- Operating pressure 10 bar
- In coils

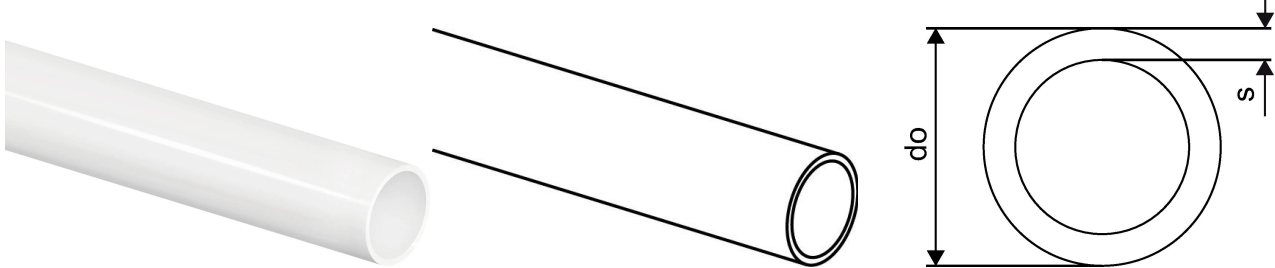

Application information Uponor Aqua Pipe natural PN10

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN10 16x2,2 100m

1022682

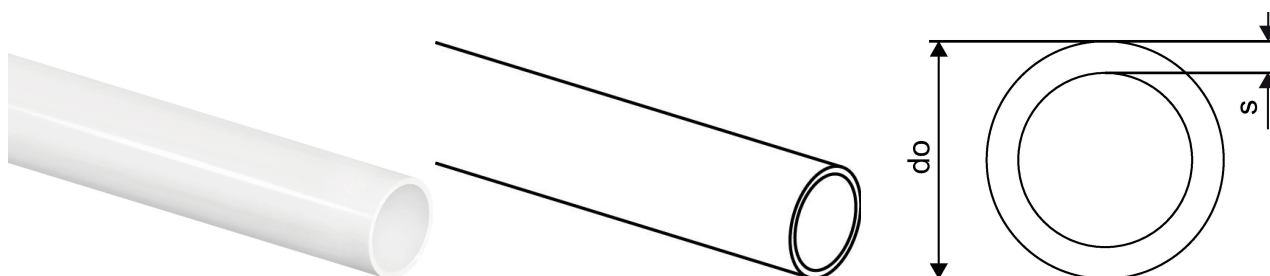

Product code

Item no EAN	7321500023553
Item no GF	35001022682
Item no GTIN	07321500023553

Dimensions

Item Unit Height	15
Item Unit Length	1000
Item Unit Weight	0,097
Item Unit Width	15
Item_UOM	m

Measurements

Outer Diameter_do	16
Wall thickness_s	2,2

Packaging

Packaging GTIN PL1	06414905260683
Packaging GTIN PL4	06414905260690
Packaging Height PL1	100
Packaging Height PL4	800
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	100
Packaging Quantity PL4	1100
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0624
Packaging Volume PL4	0,768
Packaging Weight PL1	10,83
Packaging Weight PL4	132,7

Packaging Width PL1	800
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com