


## Uponor Aqua Pipe natural PN10 S 63x8,6 6m

1023122

- Material: PE-Xa
- Operating pressure 10 bar
- In bars

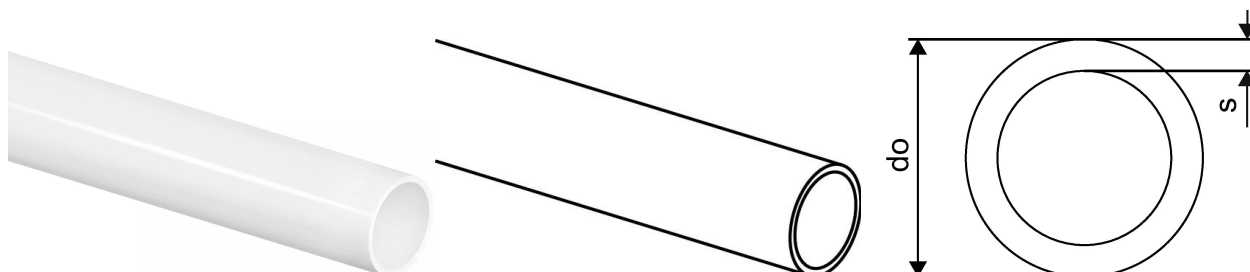

### Application information Uponor Aqua Pipe natural PN10 S

#### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural PN10 S 63x8,6 6m

1023122



### Product code

Item no EAN	7321500031480
Item no GF	35001023122
Item no GTIN	07321500031480
Item no LVI	2012599
Item no RSK	2418099
Item no VVS	087310163

### Dimensions

Item Unit Height	63
Item Unit Length	1000
Item Unit Weight	1,5
Item Unit Width	63
Item_UOM	m

### Measurements

Outer Diameter_do	63
Wall thickness_s	8,6

### Packaging

Packaging GTIN PL1	06414905295265
Packaging GTIN PL4	06414905261833
Packaging Height PL1	65
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	420
Packaging Type PL1	Plastic_Bag
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,02535

Packaging Volume PL4	2,7755
Packaging Weight PL1	9,01
Packaging Weight PL4	655
Packaging Width PL1	65
Packaging Width PL4	650

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)