
Product data sheet



GF Uponor RS adapter S-Press 63-RS2

1029125

- Made of tin-plated DR brass (lead-free)
- Fits to all RS2 or RS3 base parts.

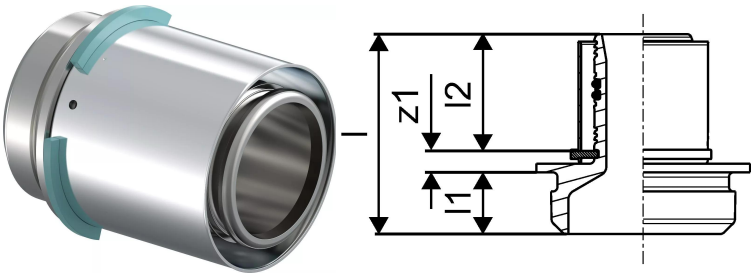

Application information GF Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor RS adapter S-Press 63-RS2

1029125

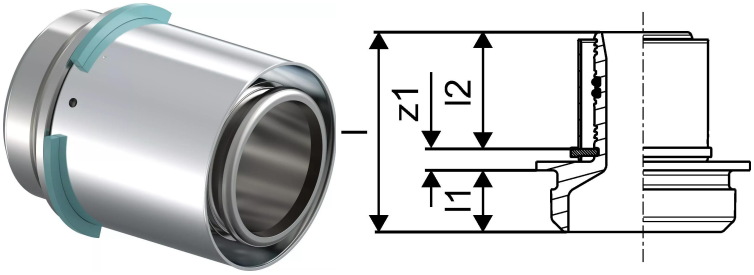

Product code

Item no EAN	4021598106628
Item no GF	35001029125
Item no GTIN	04021598106628
Item no LVI	1720822
Item no NRF	5071233
Item no VVS	045450063

Dimensions

Item Unit Height	70
Item Unit Length	92
Item Unit Weight	0,57
Item Unit Width	70
Item_UOM	pce

Measurements

LENGTH_L	87,8
Length (l1)	20
Length (l2)	60,7
z1	7,1

Packaging

Packaging GTIN PL1	06414905263776
Packaging GTIN PL4	06414905263783
Packaging Height PL1	100
Packaging Height PL4	680
Packaging Length PL1	96
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0008832
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,68
Packaging Weight PL4	252
Packaging Width PL1	92
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+