
Product data sheet



GF Uponor RS elbow 45° RS3-RS3

1029141

- Made of tin-plated DR brass (lead-free)
- Base part for all RS2 or RS3 inserts including 2 lock pins.

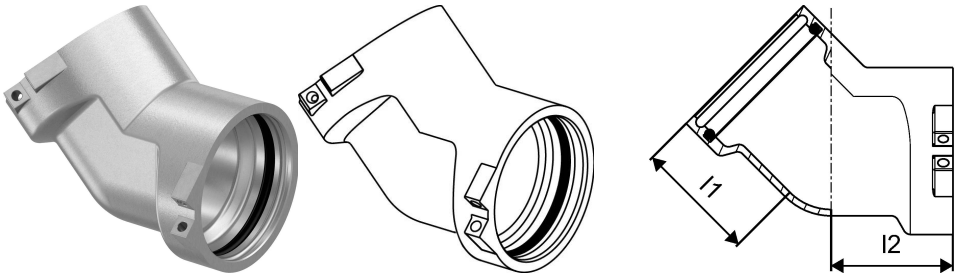

Application information GF Uponor RS elbow 45°

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor RS elbow 45° RS3-RS3

1029141

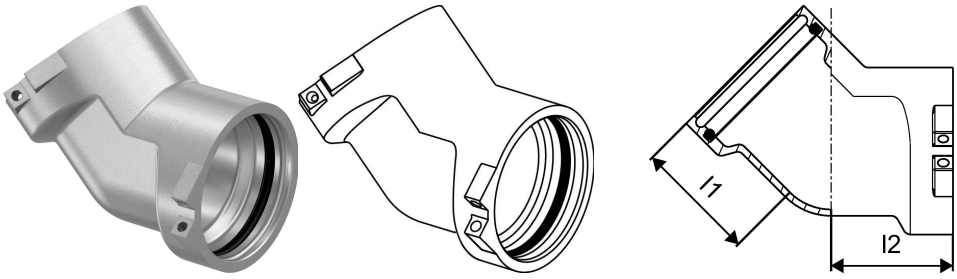

Product code

Item no EAN	4021598106789
Item no GF	35001029141
Item no GTIN	04021598106789
Item no LVI	1720814
Item no NRF	5071224
Item no RSK	1896581
Item no VVS	045454114

Dimensions

Item Unit Height	100
Item Unit Length	150
Item Unit Weight	1,93
Item Unit Width	100
Item_UOM	pce

Measurements

Length (l1)	68
Length (l2)	68

Packaging

Packaging GTIN PL1	06414905439485
Packaging GTIN PL4	06414905491391
Packaging Height PL1	110
Packaging Height PL4	750
Packaging Length PL1	163
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	175

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0028688
Packaging Volume PL4	0,72
Packaging Weight PL1	2,042
Packaging Weight PL4	357,35
Packaging Width PL1	160
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+