
Product data sheet




GF Uponor RS coupling RS3-RS3

1029145

- Made of tin-plated DR brass (lead-free)

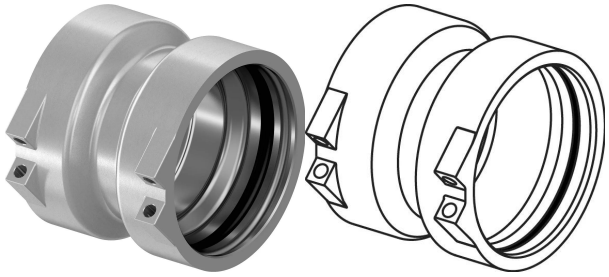



Application information GF Uponor RS coupling

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor RS coupling RS3-RS3

1029145

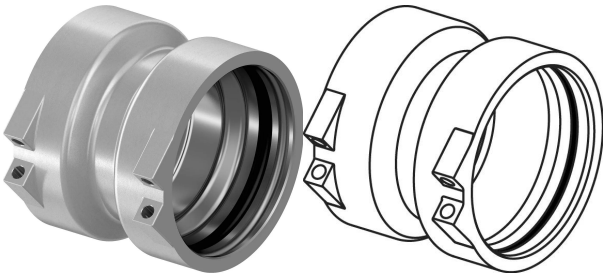



Product code

Item no EAN	4021598106826
Item no GF	35001029145
Item no GTIN	04021598106826
Item no LVI	1720810
Item no NRF	5071219
Item no RSK	1899481
Item no VVS	045456114

Dimensions

Item Unit Height	63
Item Unit Length	101
Item Unit Weight	0,73
Item Unit Width	101
Item_UOM	pce

Measurements

LENGTH_L	58

Packaging

Packaging GTIN PL1	06414905439515
Packaging GTIN PL4	06414905491421
Packaging Height PL1	70
Packaging Height PL4	600
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,001365
Packaging Volume PL4	0,576
Packaging Weight PL1	0,8
Packaging Weight PL4	378,904
Packaging Width PL1	130
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+