


Uponor S-Press elbow PPSU 75-75

1032878

- Fast installation with easy bevel and without calibration
- Colour code

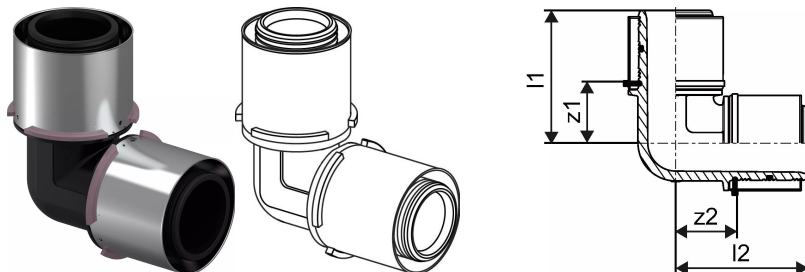

Application information Uponor S-Press elbow PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:



Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow PPSU 75-75

1032878

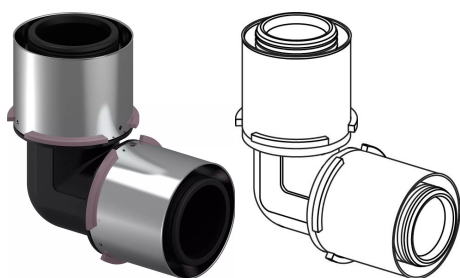

Product code

Item no EAN	6414905220779
Item no GF	35001032878
Item no GTIN	06414905220779
Item no LVI	1720115
Item no NOBB	54938955
Item no NRF	5114359
Item no RSK	1896574
Item no VVS	087430175

Dimensions

Item Unit Height	84
Item Unit Length	151
Item Unit Weight	0,625
Item Unit Width	151
Item_UOM	pce

Measurements

Length (l1)	107,5
Length (l2)	107,5
z1	46,6
z2	46,6

Packaging

Packaging GTIN PL1	06414905281084
Packaging GTIN PL4	06414905281091
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	160
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	210
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,002688
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,725
Packaging Weight PL4	177,25
Packaging Width PL1	160
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com