


## Uponor S-Press elbow 45° PPSU 63-63

**1032879**

- Fast installation with easy bevel and without calibration
- Colour code

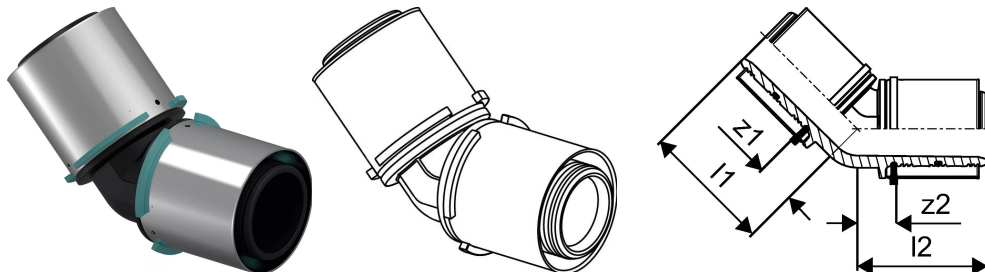

### Application information Uponor S-Press elbow 45° PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor S-Press elbow 45° PPSU 63-63

1032879

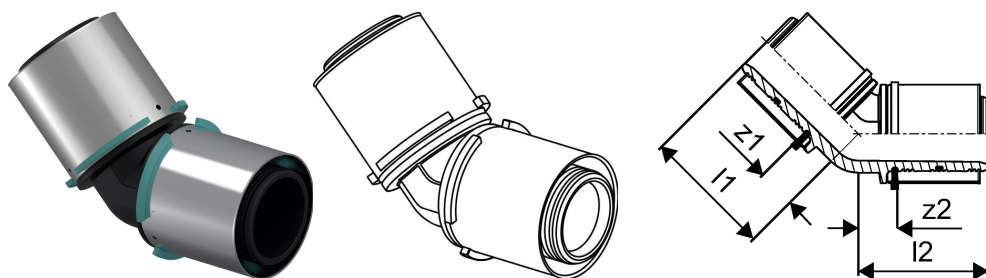

### Product code

Item no EAN	6414905220786
Item no GF	35001032879
Item no GTIN	06414905220786
Item no LVI	1720116
Item no NOBB	54938966
Item no NRF	5114361
Item no RSK	1896575
Item no VVS	087433163

### Dimensions

Item Unit Height	72
Item Unit Length	164
Item Unit Weight	0,385
Item Unit Width	117
Item_UOM	pce

### Measurements

Length (l1)	83,4
Length (l2)	83,4
z1	22,5
z2	22,5

### Packaging

Packaging GTIN PL1	06414905281039
Packaging GTIN PL4	06414905281046
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	182
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	192
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00368823
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,485
Packaging Weight PL4	118,12
Packaging Width PL1	193
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)