


Uponor S-Press coupling PPSU 75-75

1032882

- Fast installation with easy bevel and without calibration
- Colour code

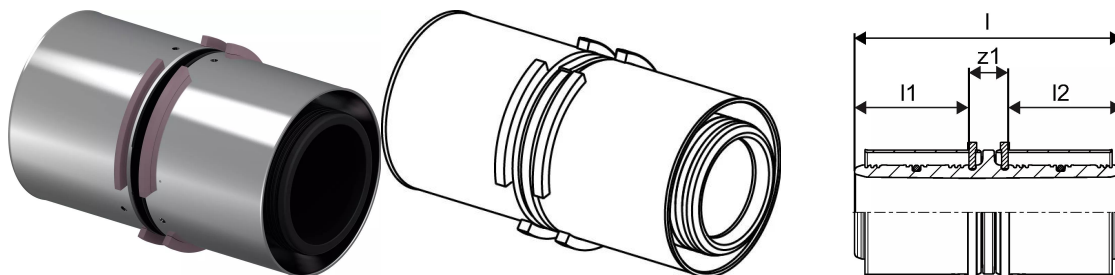

Application information Uponor S-Press coupling PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press coupling PPSU 75-75

1032882

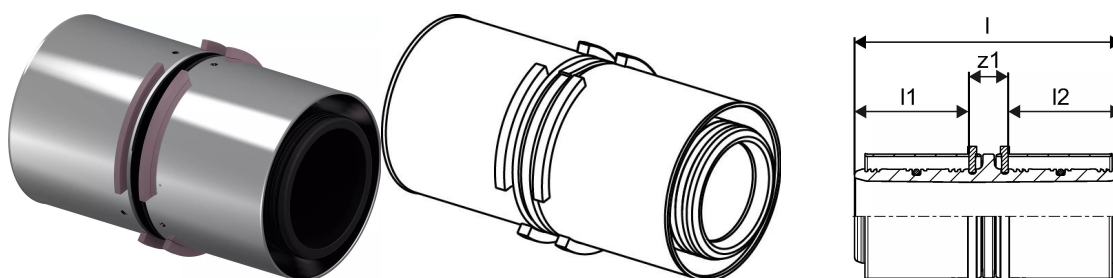

Product code

Item no EAN	6414905220816
Item no GF	35001032882
Item no GTIN	06414905220816
Item no LVI	1720119
Item no NOBB	54938993
Item no NRF	5114364
Item no RSK	1899461
Item no VVS	087452175

Dimensions

Item Unit Height	84
Item Unit Length	137
Item Unit Weight	0,488
Item Unit Width	84
Item_UOM	pce

Measurements

LENGTH_L	137
Length (I1)	60,9
Length (I2)	60,9
z1	14,8

Packaging

Packaging GTIN PL1	06414905281237
Packaging GTIN PL4	06414905281244
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	146
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	384
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00142569
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,535
Packaging Weight PL4	230,44
Packaging Width PL1	93
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com