
Product data sheet



GF Uponor S-Press tee reducer PPSU 63-40-63

1032891

- Fast installation with easy bevel and without calibration
- Colour code

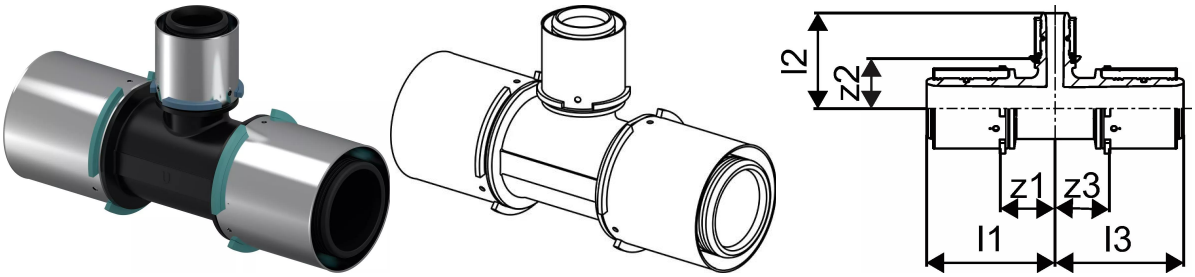

Application information GF Uponor S-Press tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


- if not different mentioned:
Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor S-Press tee reducer PPSU 63-40-63

1032891

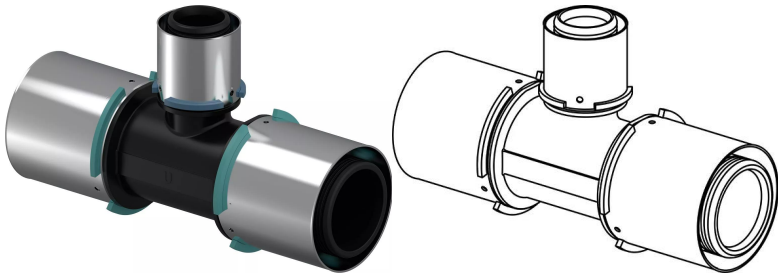

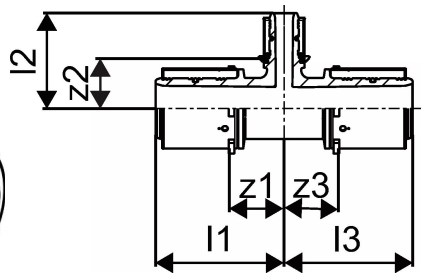

Product code

Item no EAN	6414905220908
Item no GF	35001032891
Item no GTIN	06414905220908
Item no LVI	1720160
Item no NOBB	54939080
Item no NRF	5114374
Item no RSK	1808045
Item no VVS	087442162

Dimensions

Item Unit Height	72
Item Unit Length	203
Item Unit Weight	0,504
Item Unit Width	117
Item_UOM	pce

Measurements

Length (l1)	101,2
Length (l2)	79,3
Length (l3)	101,2
z1	40,3
Z2	40,4
Z3	40,3

Packaging

Packaging GTIN PL1	06414905281435
Packaging GTIN PL4	06414905281442
Packaging Height PL1	105

Packaging Height PL4	756
Packaging Length PL1	224
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	150
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0037632
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,624
Packaging Weight PL4	118,6
Packaging Width PL1	160
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+