

Uponor S-Press adapter male thread MT 63-R2"

1032895

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Application information Uponor S-Press adapter male thread MT

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press adapter male thread MT 63-R2"

1032895

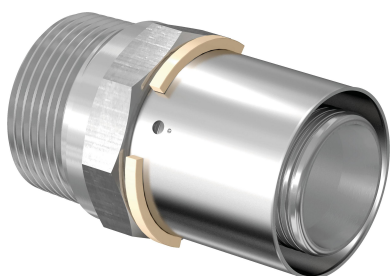

Packaging Quantity PL1	1
Packaging Quantity PL4	336
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0014193
Packaging Volume PL4	0,61632
Packaging Weight PL1	0,842
Packaging Weight PL4	306,912
Packaging Width PL1	114
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com