


Uponor S-Press adapter male thread MT 75-R2 1/2"

1032896

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

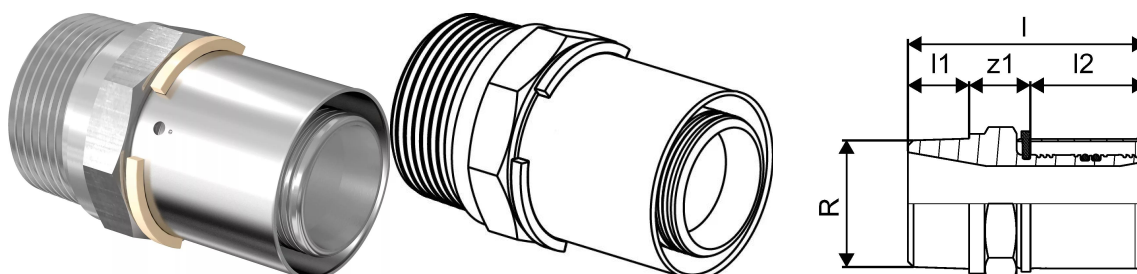

Application information Uponor S-Press adapter male thread MT

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press adapter male thread MT 75-R2 1/2"

1032896

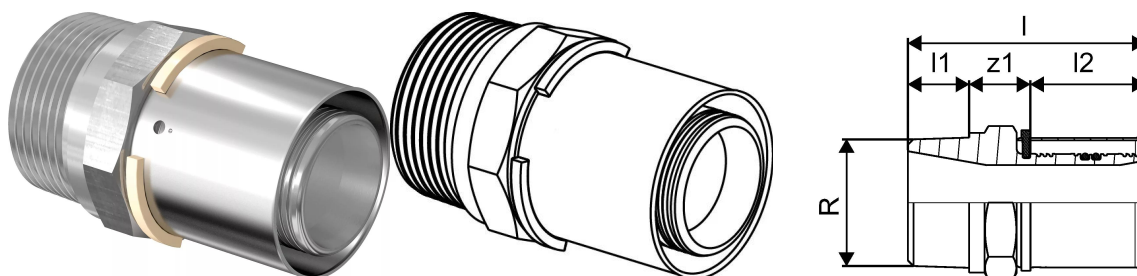

Product code

Item no EAN	6414905220755
Item no GF	35001032896
Item no GTIN	06414905220755
Item no LVI	1720169
Item no NRF	5114379
Item no RSK	1899467
Item no VVS	045481075

Dimensions

Item Unit Height	84
Item Unit Length	110
Item Unit Weight	1,012
Item Unit Width	84
Item_UOM	pce

Measurements

LENGTH_L	109,86
Length (l1)	27
Length (l2)	60,6
Male_thread_R	2 1/2
Z Measurement d	75
z1	22

Packaging

Packaging GTIN PL1	06414905523481
Packaging GTIN PL4	06414905523498
Packaging Height PL1	83
Packaging Height PL4	642
Packaging Length PL1	150
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL4	336
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0014193
Packaging Volume PL4	0,61632
Packaging Weight PL1	1,068
Packaging Weight PL4	382,848
Packaging Width PL1	114
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com