
Product data sheet



GF Uponor Aqua Pipe natural PN10 S 40x5,5 6m

1033864

- Material: PE-Xa
- Operating pressure 10 bar
- In bars

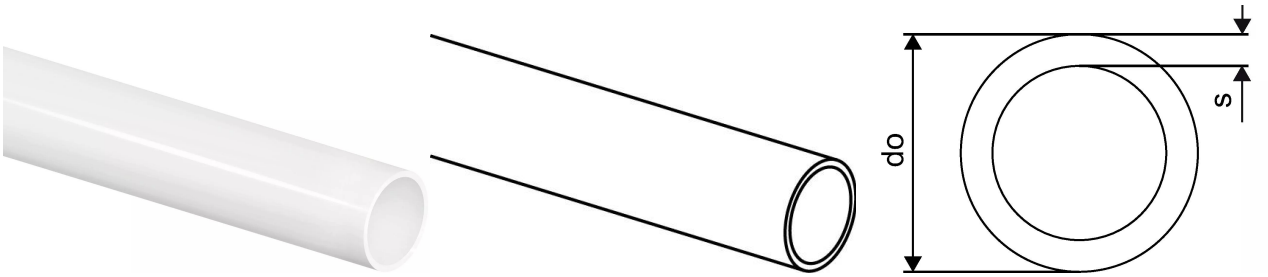

Application information GF Uponor Aqua Pipe natural PN10 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural PN10 S 40x5,5 6m

1033864

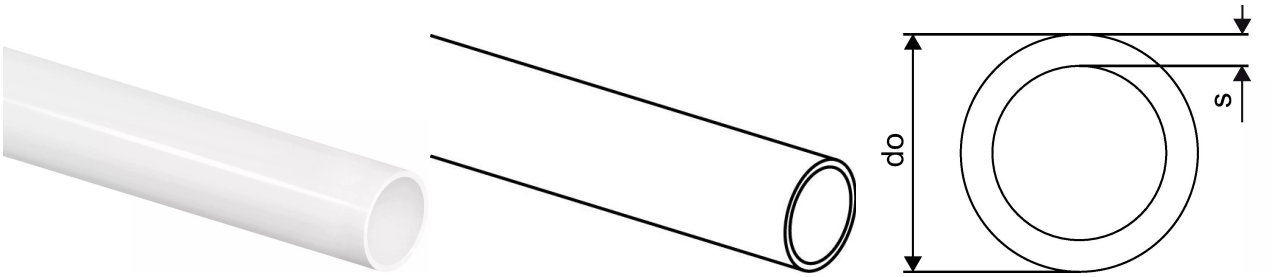

Product code

Item no EAN	7321500023546
Item no GF	35001033864
Item no GTIN	07321500023546
Item no LVI	2012595
Item no NRF	5110046
Item no RSK	2418097
Item no VVS	087310140

Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,602
Item Unit Width	40
Item_UOM	m

Measurements

Outer Diameter_do	40
Wall thickness_s	5,5

Packaging

Packaging GTIN PL1	06414900622608
Packaging GTIN PL4	06414905662883
Packaging Height PL1	41
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	840

Packaging Type PL1	BAR
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,010086
Packaging Volume PL4	2,7755
Packaging Weight PL1	3,624
Packaging Weight PL4	532,36
Packaging Width PL1	41
Packaging Width PL4	650

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+