


Uponor Ecoflex wall through sealing 140

1034202

- For concrete-cast and brick walls
- Prevents moisture from entering the building
- Applicable for NWP = no pressurized water area

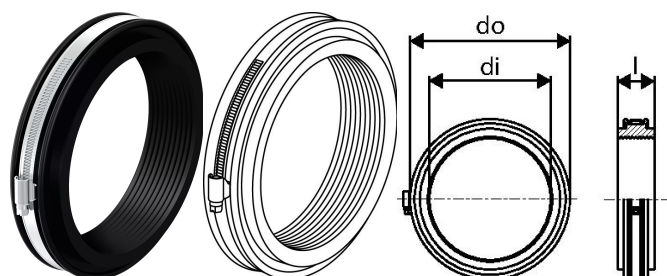

Application information Uponor Ecoflex wall through sealing

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex wall through sealing 140

1034202

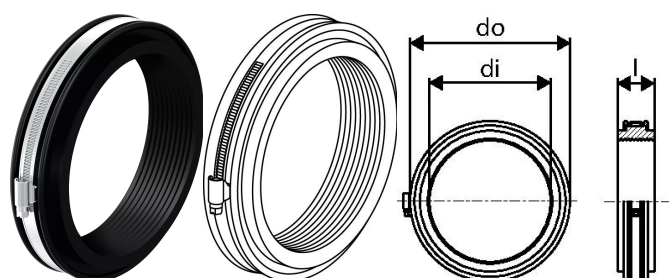

Measurements

Inner_diameter_di	140
LENGTH_L	40
Outer Diameter_do	190

Product code

Item no EAN	7321500038595
Item no GF	35001034202
Item no GTIN	07321500038595
Item no LVI	3010647
Item no NOBB	41945540
Item no NRF	8360581
Item no RSK	4054775
Item no VVS	087916314

Dimensions

Item Unit Height	40
Item Unit Length	190
Item Unit Weight	0,36
Item Unit Width	190
Item_UOM	pce

Packaging

Packaging GTIN PL3	06414905266043
Packaging Height PL3	260
Packaging Length PL3	600
Packaging Quantity PL3	40
Packaging Type PL3	Box
Packaging Volume PL3	0,0624
Packaging Weight PL3	15
Packaging Width PL3	400

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com