


## Uponor Aqua Pipe natural PN6 20x1,9 200m

1038356

- Material: PE-Xa
- Operating pressure 6 bar
- In coils

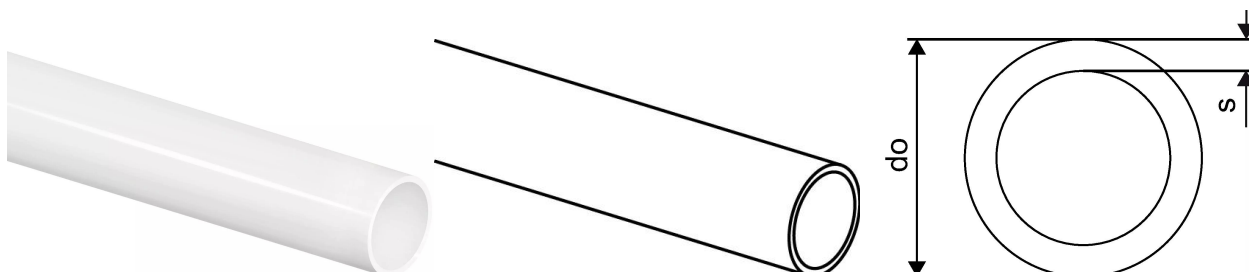

### Application information Uponor Aqua Pipe natural PN6

#### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural PN6 20x1,9 200m

1038356



### Product code

Item no EAN	6414905513918
Item no GF	35001038356
Item no GTIN	06414905513918

### Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,12
Item Unit Width	20
Item_UOM	m

### Measurements

Outer Diameter_do	20
Wall thickness_s	1,9

### Packaging

Packaging GTIN PL1	06414905266760
Packaging GTIN PL4	06414905266777
Packaging Height PL1	804
Packaging Height PL4	948
Packaging Length PL1	788
Packaging Length PL4	1200
Packaging Quantity PL1	200
Packaging Quantity PL4	1000
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,147617616
Packaging Volume PL4	0,91008
Packaging Weight PL1	25,5
Packaging Weight PL4	160

Packaging Width PL1	233
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)