


Uponor Aqua Pipe natural PN6 25x2,3 100m

1038363

- Material: PE-Xa
- Operating pressure 6 bar
- In coils

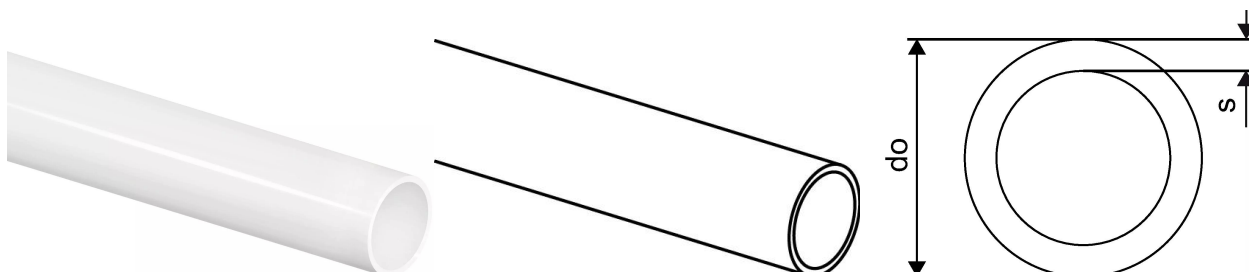

Application information Uponor Aqua Pipe natural PN6

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN6 25x2,3 100m

1038363



Product code

Item no EAN	6414905513925
Item no GF	35001038363
Item no GTIN	06414905513925

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,17
Item Unit Width	25
Item_UOM	m

Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

Packaging

Packaging GTIN PL1	06414905266784
Packaging GTIN PL4	06414905266791
Packaging Height PL1	804
Packaging Height PL4	948
Packaging Length PL1	788
Packaging Length PL4	1200
Packaging Quantity PL1	100
Packaging Quantity PL4	600
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,1267104
Packaging Volume PL4	0,91008
Packaging Weight PL1	18
Packaging Weight PL4	127

Packaging Width PL1	200
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com