


Uponor Aqua Pipe natural PN6 32x2,9 50m

1038365

- Material: PE-Xa
- Operating pressure 6 bar
- In coils

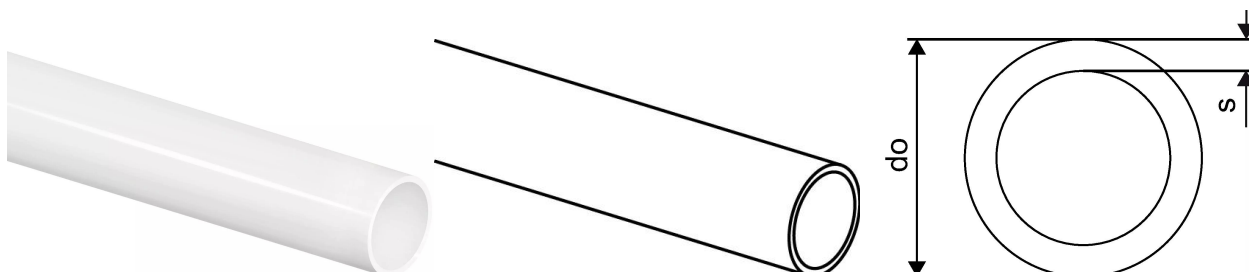

Application information Uponor Aqua Pipe natural PN6

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN6 32x2,9 50m

1038365



Product code

Item no EAN	6414905513949
Item no GF	35001038365
Item no GTIN	06414905513949

Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,3
Item Unit Width	32
Item_UOM	m

Measurements

Outer Diameter_do	32
Wall thickness_s	2,9

Packaging

Packaging GTIN PL3	06414905266821
Packaging GTIN PL4	06414905266838
Packaging Height PL3	804
Packaging Height PL4	948
Packaging Length PL3	788
Packaging Length PL4	1200
Packaging Quantity PL3	50
Packaging Quantity PL4	300
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,1267104
Packaging Volume PL4	0,91008
Packaging Weight PL3	15,15
Packaging Weight PL4	115

Packaging Width PL3	200
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com