


Uponor S-Press PLUS elbow PPSU 20-20

1039930

- Material: PPSU

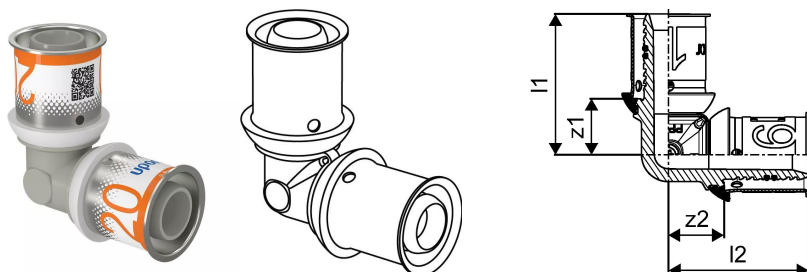

Application information Uponor S-Press PLUS elbow PPSU

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS elbow PPSU 20-20

1039930

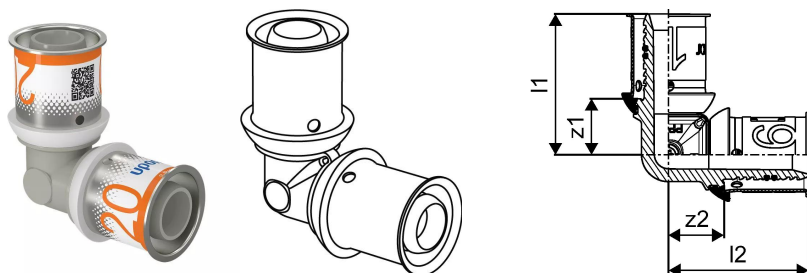

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905228690 |
| Item no GF | 35001039930 |
| Item no GTIN | 06414905228690 |
| Item no LVI | 1720687 |
| Item no NOBB | 55171461 |
| Item no NRF | 5114382 |
| Item no RSK | 1896526 |
| Item no VVS | 087430120 |

Dimensions

| | |
|------------------|--------|
| Item Unit Height | 49.85 |
| Item Unit Length | 49.85 |
| Item Unit Weight | 0,0272 |
| Item Unit Width | 25.7 |
| Item_UOM | pce |

Measurements

| | |
|-------------|------|
| Length (l1) | 37 |
| Length (l2) | 37 |
| z1 | 15,7 |
| z2 | 15,7 |

Packaging

| | |
|----------------------|----------------|
| Packaging GTIN PL1 | 06414905289431 |
| Packaging GTIN PL3 | 06414905425495 |
| Packaging GTIN PL4 | 06414905289455 |
| Packaging Height PL1 | 89 |
| Packaging Height PL3 | 188 |
| Packaging Height PL4 | 708 |
| Packaging Length PL1 | 176 |

| | |
|---------------------------------|---|
| Packaging Length PL3 | 277 |
| Packaging Length PL4 | 1200 |
| Packaging Material (number) PL1 | 21 |
| Packaging Material (number) PL3 | 20 |
| Packaging Material (number) PL4 | 50 |
| Packaging Material PL1 | non-corrugated cardbone / cartone non corrugato |
| Packaging Material PL3 | corrugated cardbone / cartone |
| Packaging Material PL4 | europallet / europallet |
| Packaging Material (short) PL1 | PAP |
| Packaging Material (short) PL3 | PAP |
| Packaging Material (short) PL4 | FOR |
| Packaging Quantity PL1 | 10 |
| Packaging Quantity PL3 | 80 |
| Packaging Quantity PL4 | 3840 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,001049488 |
| Packaging Volume PL3 | 0,009321604 |
| Packaging Volume PL4 | 0,67968 |
| Packaging Weight PL1 | 0,307 |
| Packaging Weight PL3 | 2,716 |
| Packaging Weight PL4 | 154,848 |
| Packaging Width PL1 | 67 |
| Packaging Width PL3 | 179 |
| Packaging Width PL4 | 800 |

Technical data

| | |
|--------------------------|---|
| Recycling Text Block PL1 | non-corrugated cardbone / cartone non corrugato |
| Recycling Text Block PL3 | corrugated cardbone / cartone |
| Recycling Text Block PL4 | europallet / europallet |

Documents

Page with all documents 

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com