


## Uponor S-Press PLUS reducer PPSU 32-25

1039940

- Material: PPSU

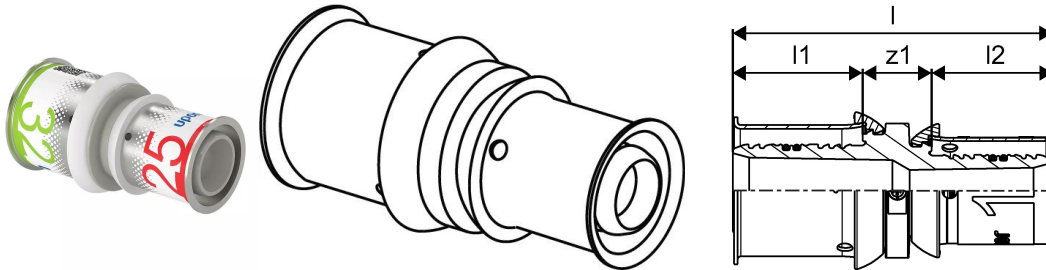

### Application information Uponor S-Press PLUS reducer PPSU

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS reducer PPSU 32-25

1039940

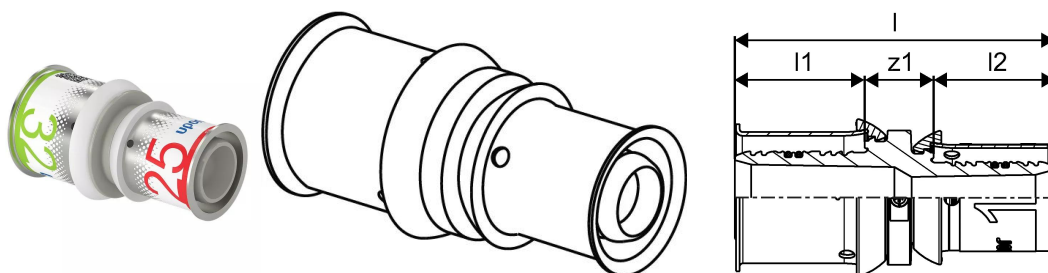

## Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905228782  |
| Item no GF   | 35001039940    |
| Item no GTIN | 06414905228782 |
| Item no LVI  | 1720697        |
| Item no NOBB | 55171563       |
| Item no NRF  | 5114393        |
| Item no RSK  | 1899406        |
| Item no VVS  | 087454132      |

## Dimensions

|                  |         |
|------------------|---------|
| Item Unit Height | 39.3    |
| Item Unit Length | 69      |
| Item Unit Weight | 0,05843 |
| Item Unit Width  | 39.3    |
| Item_UOM         | pce     |

## Measurements

|             |      |
|-------------|------|
| LENGTH_L    | 69   |
| Length (l1) | 27,8 |
| Length (l2) | 28,3 |
| z1          | 12,9 |

## Packaging

|                      |                |
|----------------------|----------------|
| Packaging GTIN PL1   | 06414905635191 |
| Packaging GTIN PL3   | 06414905635207 |
| Packaging GTIN PL4   | 06414905477906 |
| Packaging Height PL1 | 89             |
| Packaging Height PL3 | 189            |
| Packaging Height PL4 | 711            |
| Packaging Length PL1 | 176            |

|                        |             |
|------------------------|-------------|
| Packaging Length PL3   | 357         |
| Packaging Length PL4   | 1200        |
| Packaging Quantity PL1 | 10          |
| Packaging Quantity PL3 | 80          |
| Packaging Quantity PL4 | 1920        |
| Packaging Type PL1     | Base_Box    |
| Packaging Type PL3     | Box         |
| Packaging Type PL4     | Pallet      |
| Packaging Volume PL1   | 0,00211464  |
| Packaging Volume PL3   | 0,018555075 |
| Packaging Volume PL4   | 0,68256     |
| Packaging Weight PL1   | 0,654       |
| Packaging Weight PL3   | 5,752       |
| Packaging Weight PL4   | 163,048     |
| Packaging Width PL1    | 135         |
| Packaging Width PL3    | 275         |
| Packaging Width PL4    | 800         |

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)