


Uponor S-Press tee reducer PPSU 40-20-40

1039962

- Fast installation with easy bevel and without calibration
- Colour code

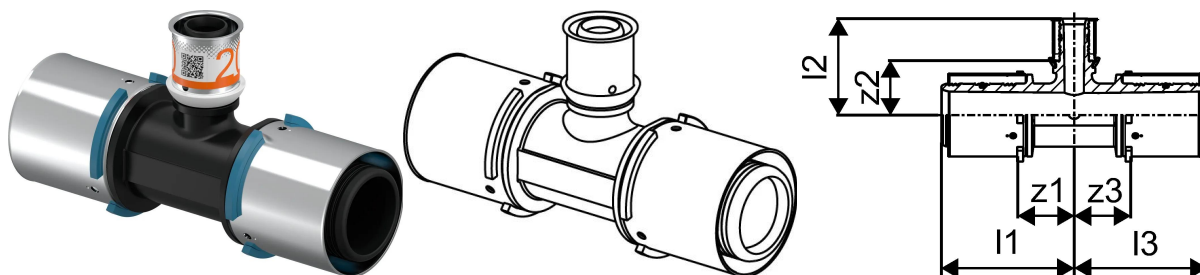

Application information Uponor S-Press tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer PPSU 40-20-40

1039962

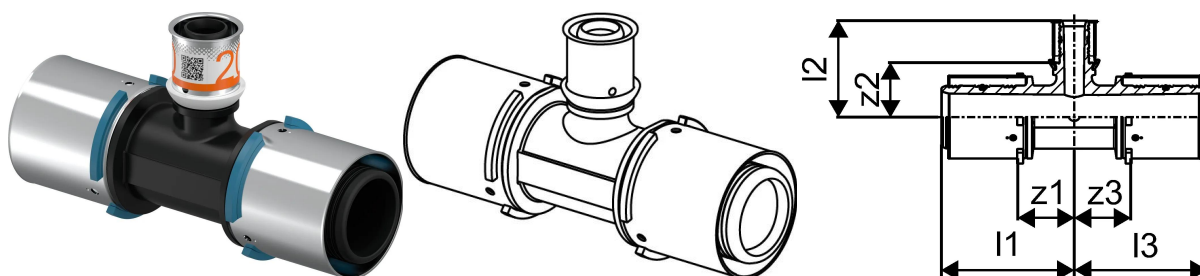

Product code

Item no EAN	6414905229000
Item no GF	35001039962
Item no GTIN	06414905229000
Item no LVI	1720719
Item no NRF	5114417
Item no RSK	1807998
Item no VVS	087442138

Dimensions

Item Unit Height	71.865
Item Unit Length	135.2
Item Unit Weight	0,14657
Item Unit Width	45.725
Item_UOM	pce

Measurements

Length (l1)	67,6
Length (l2)	49
Length (l3)	67,6
z1	28,7
z2	27,7
z3	28,7

Packaging

Packaging GTIN PL1	06414905480173
Packaging GTIN PL4	06414905480180
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200

Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,774
Packaging Weight PL4	181,987
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com