


Uponor S-Press tee reducer PPSU 50-32-50

1039969

- Fast installation with easy bevel and without calibration
- Colour code

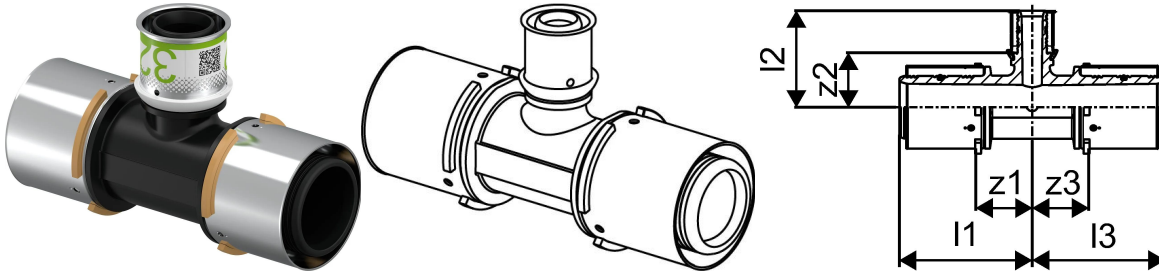

Application information Uponor S-Press tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer PPSU 50-32-50

1039969

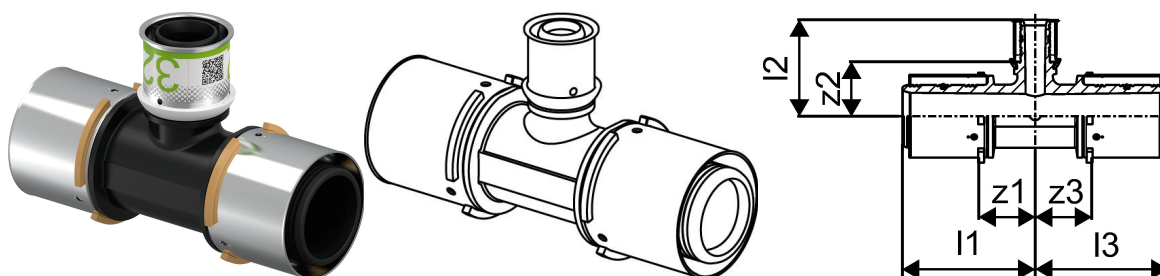

Product code

Item no EAN	6414905229079
Item no GF	35001039969
Item no GTIN	06414905229079
Item no LVI	1720726
Item no NRF	5114425
Item no RSK	1808005
Item no VVS	087442149

Dimensions

Item Unit Height	88.7
Item Unit Length	145.2
Item Unit Weight	0,22582
Item Unit Width	55.4
Item_UOM	pce

Measurements

Length (l1)	72,6
Length (l2)	61
Length (l3)	72,6
z1	33,7
z2	33,2
z3	33,7

Packaging

Packaging GTIN PL1	06414905480319
Packaging GTIN PL4	06414905480326
Packaging Height PL1	185
Packaging Height PL4	699
Packaging Length PL1	185
Packaging Length PL4	1200

Packaging Quantity PL1	3
Packaging Quantity PL4	432
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0031487
Packaging Volume PL4	0,67104
Packaging Weight PL1	0,747
Packaging Weight PL4	131,634
Packaging Width PL1	92
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com