


Uponor S-Press elbow 45° PPSU 40-40

1046388

- Fast installation with easy bevel and without calibration
- Colour code

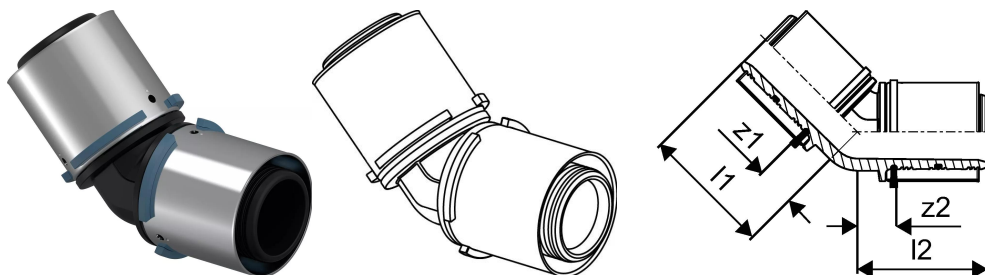

Application information Uponor S-Press elbow 45° PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press elbow 45° PPSU 40-40

1046388

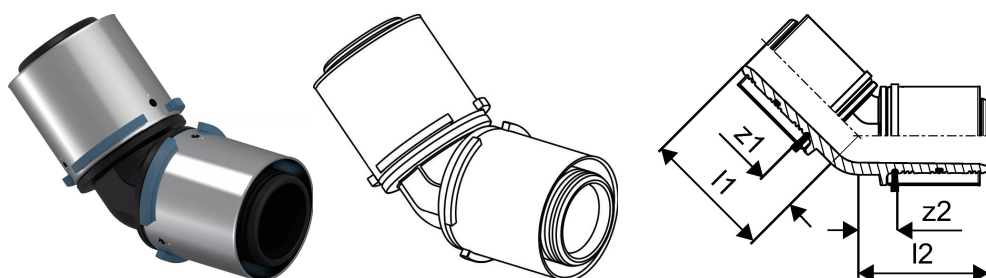

Product code

Item no EAN	4021598112629
Item no GF	35001046388
Item no GTIN	04021598112629
Item no LVI	1721056
Item no NOBB	48505478
Item no NRF	5071977
Item no RSK	1877962
Item no VVS	087433140

Dimensions

Item Unit Height	47
Item Unit Length	64
Item Unit Weight	0,123
Item Unit Width	64
Item_UOM	pce

Measurements

Length (l1)	55,6
Length (l2)	55,6
z1	16,6
Z2	16,6

Packaging

Packaging GTIN PL1	06414905287536
Packaging GTIN PL4	06414905287543
Packaging Height PL1	89
Packaging Height PL4	570
Packaging Length PL1	176
Packaging Length PL4	1120
Packaging Quantity PL1	5

Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,654
Packaging Weight PL4	132,538
Packaging Width PL1	135
Packaging Width PL4	748

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com