


Uponor S-Press elbow 45° PPSU 50-50

1046389

- Fast installation with easy bevel and without calibration
- Colour code

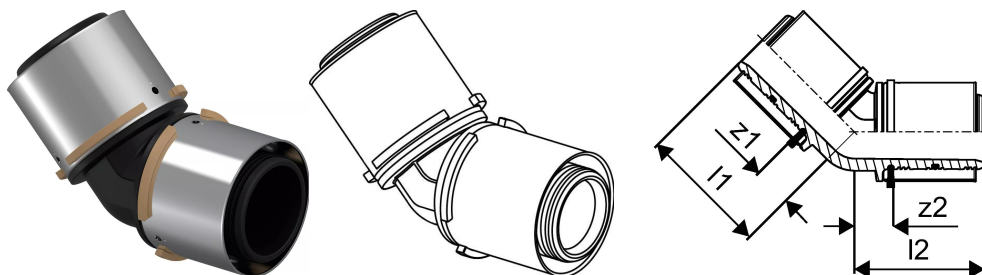

Application information Uponor S-Press elbow 45° PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
 - DVGW
 - AENOR

Uponor S-Press elbow 45° PPSU 50-50

1046389

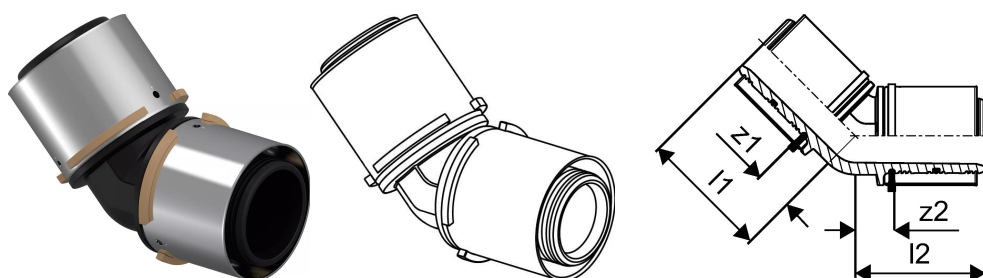

Product code

Item no EAN	4021598112636
Item no GF	35001046389
Item no GTIN	04021598112636
Item no LVI	1721057
Item no NOBB	48505497
Item no NRF	5071978
Item no RSK	1877963
Item no VVS	087433150

Dimensions

Item Unit Height	110
Item Unit Length	54
Item Unit Weight	0,17
Item Unit Width	54
Item_UOM	pce

Measurements

Length (l1)	58,6
Length (l2)	58,6
z1	20
Z2	20

Packaging

Packaging GTIN PL1	06414905287550
Packaging GTIN PL4	06414905287567
Packaging Height PL1	90
Packaging Height PL4	600
Packaging Length PL1	175
Packaging Length PL4	1200
Packaging Quantity PL1	3

Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00212625
Packaging Volume PL4	0,576
Packaging Weight PL1	0,58
Packaging Weight PL4	134
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com