


Uponor S-Press coupling PPSU 40-40

1046401

- Fast installation with easy bevel and without calibration
- Colour code

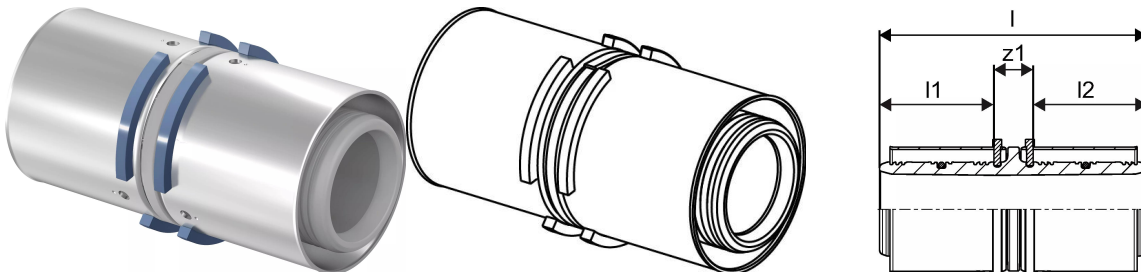

Application information Uponor S-Press coupling PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press coupling PPSU 40-40

1046401

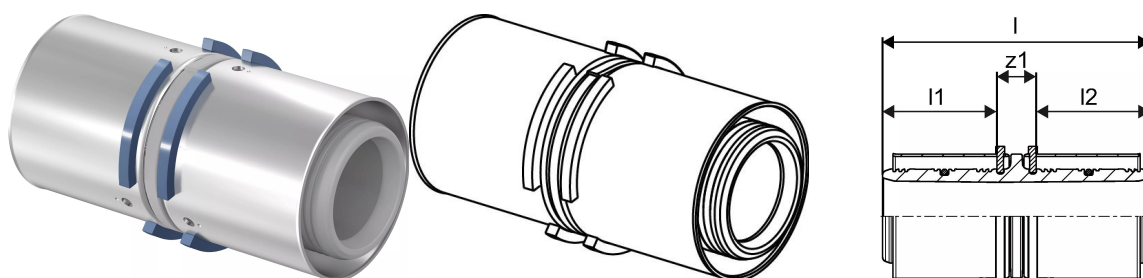

Product code

Item no EAN	4021598112759
Item no GF	35001046401
Item no GTIN	04021598112759
Item no LVI	1722720
Item no NOBB	48519361
Item no NRF	5072016
Item no RSK	1877975
Item no VVS	087452140

Dimensions

Item Unit Height	93
Item Unit Length	44
Item Unit Weight	0,11
Item Unit Width	44
Item_UOM	pce

Measurements

LENGTH_L	91
Length (I1)	38,8
Length (I2)	38,8
z1	13,4

Packaging

Packaging GTIN PL1	06414905287604
Packaging GTIN PL4	06414905287611
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5

Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,589
Packaging Weight PL4	130,6
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com