


Uponor S-Press coupling PPSU 50-50

1046402

- Fast installation with easy bevel and without calibration
- Colour code

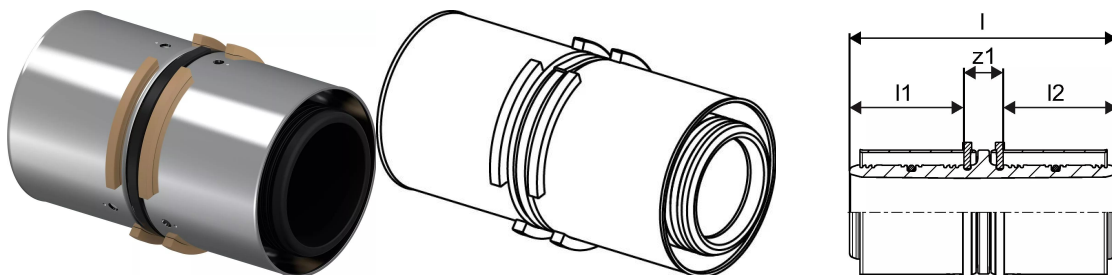

Application information Uponor S-Press coupling PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press coupling PPSU 50-50

1046402

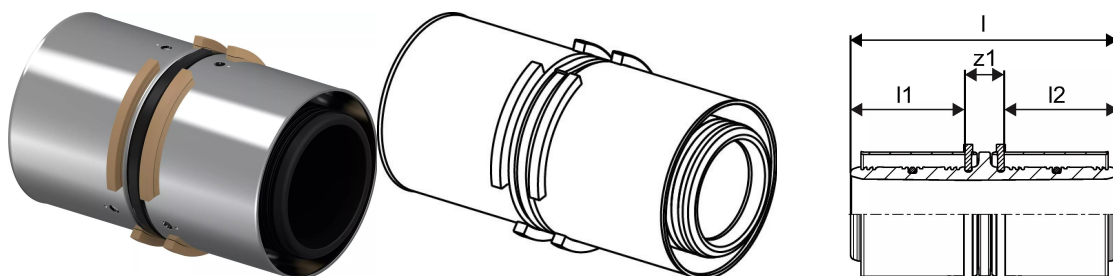

Product code

Item no EAN	4021598112766
Item no GF	35001046402
Item no GTIN	04021598112766
Item no LVI	1722721
Item no NOBB	48519497
Item no NRF	5072017
Item no RSK	1877976
Item no VVS	087452150

Dimensions

Item Unit Height	52
Item Unit Length	90
Item Unit Weight	0,15
Item Unit Width	52
Item_UOM	pce

Measurements

LENGTH_L	91
Length (l1)	38,8
Length (l2)	38,8
z1	13,4

Packaging

Packaging GTIN PL1	06414905287628
Packaging GTIN PL4	06414905287635
Packaging Height PL1	90
Packaging Height PL4	580
Packaging Length PL1	175
Packaging Length PL4	1200
Packaging Quantity PL1	3

Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00215775
Packaging Volume PL4	0,5568
Packaging Weight PL1	0,53
Packaging Weight PL4	126,76
Packaging Width PL1	137
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com