


Uponor S-Press adapter male thread 40-R1 1/4"MT

1046901

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

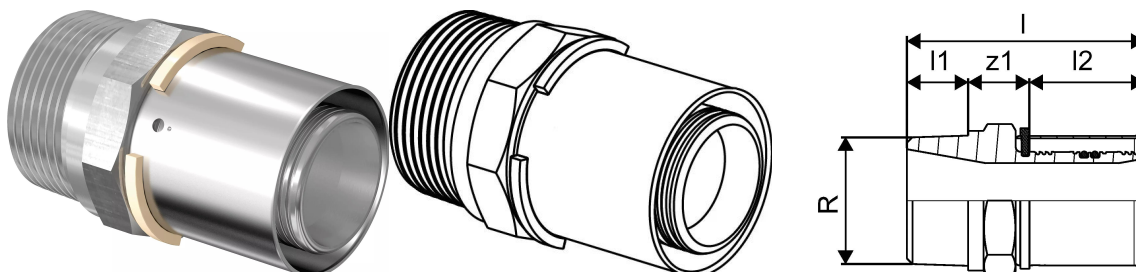

Application information Uponor S-Press adapter male thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:
Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

Uponor S-Press adapter male thread 40-R1 1/4"MT

1046901

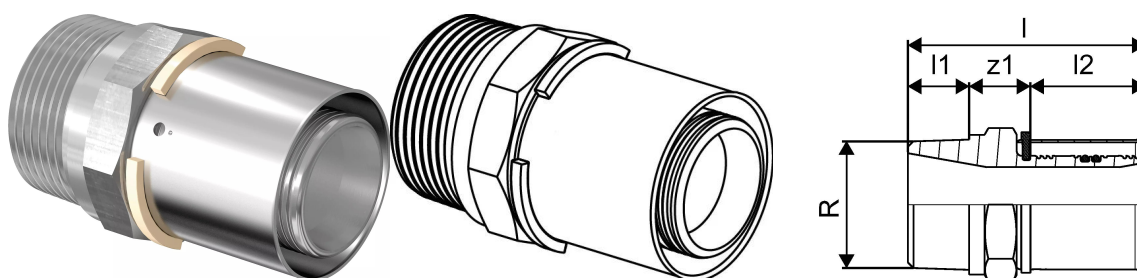

Product code

Item no EAN	4021598113985
Item no GF	35001046901
Item no GTIN	04021598113985
Item no VVS	045481420

Dimensions

Item Unit Height	75
Item Unit Length	55
Item Unit Weight	0,381
Item Unit Width	55
Item_UOM	pce

Measurements

LENGTH_L	77,5
Length (l1)	20
Length (l2)	37,5
Male_thread_R	1 1/4
Z Measurement d	40
z1	20

Packaging

Packaging GTIN PL1	06414905401413
Packaging GTIN PL4	06414905401420
Packaging Height PL1	89
Packaging Height PL4	560
Packaging Length PL1	176
Packaging Length PL4	1120
Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,4691456
Packaging Weight PL1	1,944
Packaging Weight PL4	378,816
Packaging Width PL1	135
Packaging Width PL4	748

Documents

Page with all documents

↓

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com