


Uponor S-Press adapter male thread 50-R1 1/2"MT

1046905

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

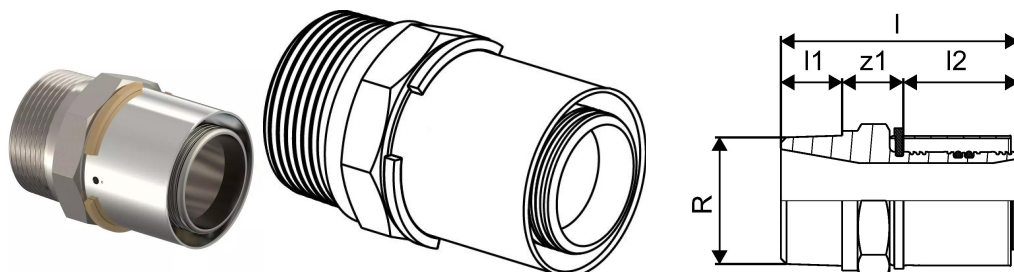

Application information Uponor S-Press adapter male thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:
Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

Uponor S-Press adapter male thread 50-R1 1/2"MT

1046905

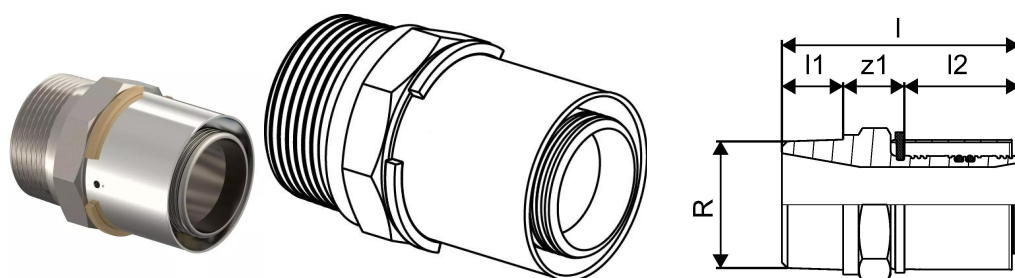

Product code

Item no EAN	4021598114029
Item no GF	35001046905
Item no GTIN	04021598114029
Item no VVS	045481445

Dimensions

Item Unit Height	55
Item Unit Length	72
Item Unit Weight	0,348
Item Unit Width	55
Item_UOM	pce

Measurements

LENGTH_L	72
Length (I1)	20
Length (I2)	37,5
Male_thread_R	1 1/2
Z Measurement d	50
z1	14,5

Packaging

Packaging GTIN PL1	06414905401499
Packaging GTIN PL4	06414905401505
Packaging Height PL1	90
Packaging Height PL4	560
Packaging Length PL1	70
Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	1152
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,0011025
Packaging Volume PL4	0,4691456
Packaging Weight PL1	1,513
Packaging Weight PL4	580,992
Packaging Width PL1	175
Packaging Width PL4	748

Documents

Page with all documents

↓

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com