


Uponor S-Press adapter female thread 50-Rp1 1/2"FT

1046907

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

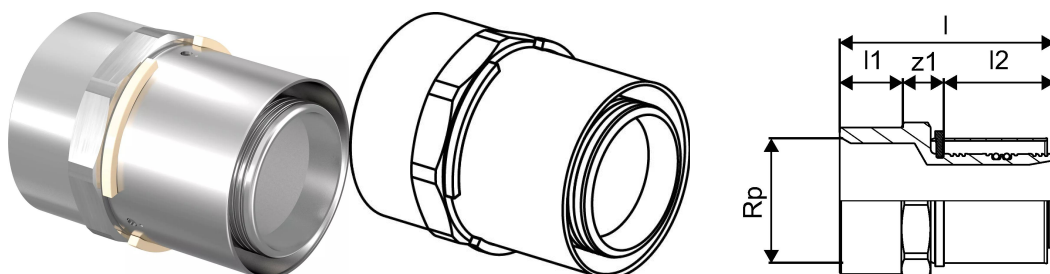

Application information Uponor S-Press adapter female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press adapter female thread 50-Rp1 1/2"FT

1046907

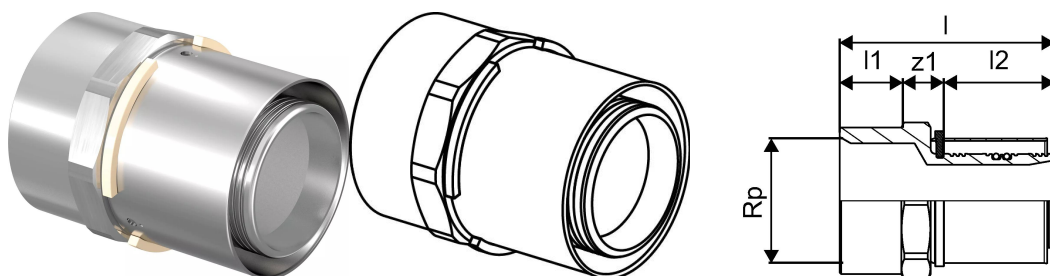

Measurements

Female thread Rp	1 1/2
LENGTH_L	72,5
Length (l1)	21,4
Length (l2)	37,5
z1	13,6

Product code

Item no EAN	4021598114043
Item no GF	35001046907
Item no GTIN	04021598114043
Item no NOBB	48505338
Item no NRF	5071554
Item no VVS	045482445

Dimensions

Item Unit Height	55
Item Unit Length	72.5
Item Unit Weight	0,369
Item Unit Width	55
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481088
Packaging GTIN PL4	06414905481095
Packaging Height PL1	90
Packaging Height PL4	570
Packaging Length PL1	70
Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	1152

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0011025
Packaging Volume PL4	0,4775232
Packaging Weight PL1	1,169
Packaging Weight PL4	433,233
Packaging Width PL1	175
Packaging Width PL4	748

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com