


Uponor S-Press tee 40-40-40

1046921

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

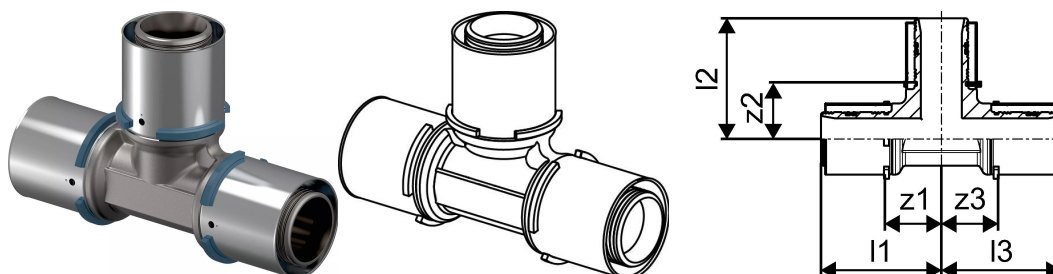

Application information Uponor S-Press tee

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee 40-40-40

1046921

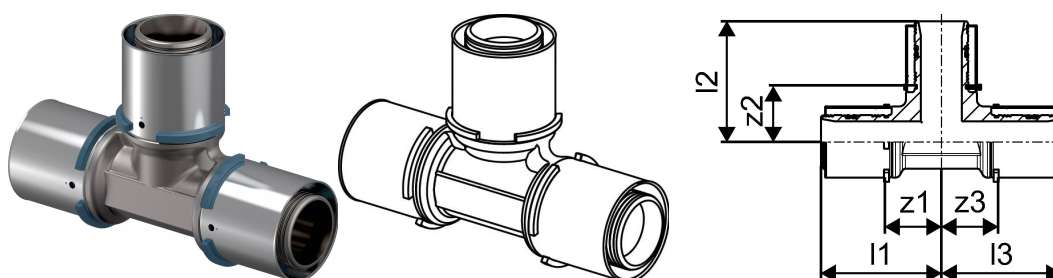

Product code

Item no EAN	4021598114180
Item no GF	35001046921
Item no GTIN	04021598114180
Item no VVS	045476040

Dimensions

Item Unit Height	48
Item Unit Length	140
Item Unit Weight	0,684
Item Unit Width	103
Item_UOM	pce

Measurements

Length (l1)	71,5
Length (l2)	71,5
Length (l3)	71,5
z1	33,6
z2	33,6
z3	33,6

Packaging

Packaging GTIN PL1	06414905401611
Packaging GTIN PL4	06414905401628
Packaging Height PL1	105
Packaging Height PL4	800
Packaging Length PL1	200
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00378
Packaging Volume PL4	0,768
Packaging Weight PL1	3,499
Packaging Weight PL4	301,336
Packaging Width PL1	180
Packaging Width PL4	800

Documents

Page with all documents

↓

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com