


Uponor S-Press tee reducer 50-25-50

1046925

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

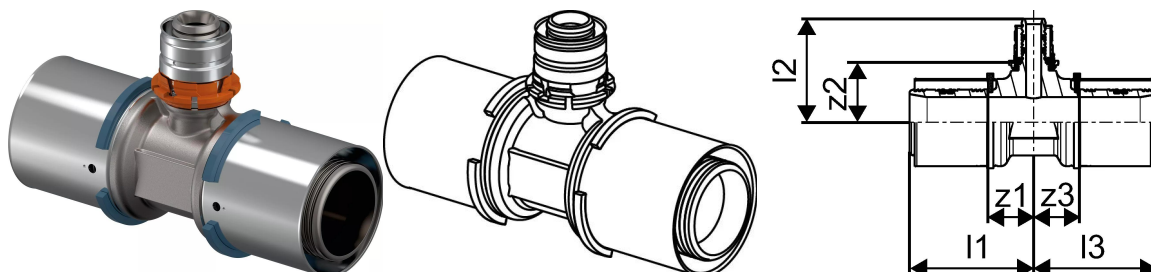

Application information Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer 50-25-50

1046925

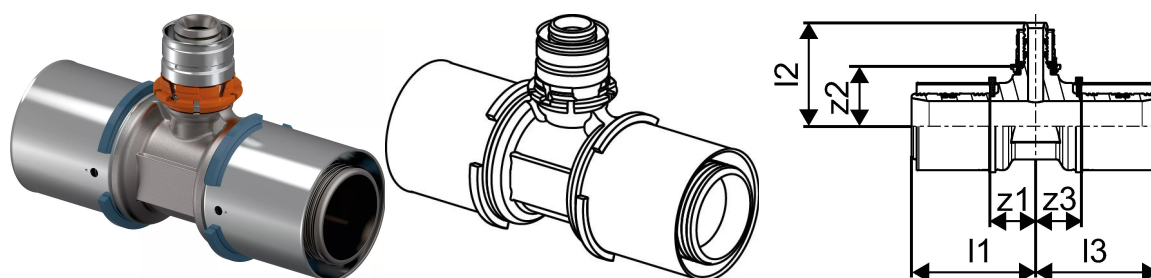

Status

Item Available Till date

2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598114227
Item no GF	35001046925
Item no GTIN	04021598114227
Item no VVS	045476437

Dimensions

Item Unit Height	57
Item Unit Length	119
Item Unit Weight	0,643
Item Unit Width	97
Item_UOM	pce

Measurements

Length (I1)	61
Length (I2)	65
Length (I3)	61
z1	23,1
Z2	34,7
Z3	23,1

Packaging

Packaging GTIN PL1	06414905460663
Packaging GTIN PL4	06414905493470
Packaging Height PL1	110
Packaging Height PL4	584
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	3

Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0039688
Packaging Volume PL4	0,56064
Packaging Weight PL1	2,011
Packaging Weight PL4	180,863
Packaging Width PL1	205
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com