


## Uponor S-Press tee female thread 50-Rp1"FT-50

**1046929**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

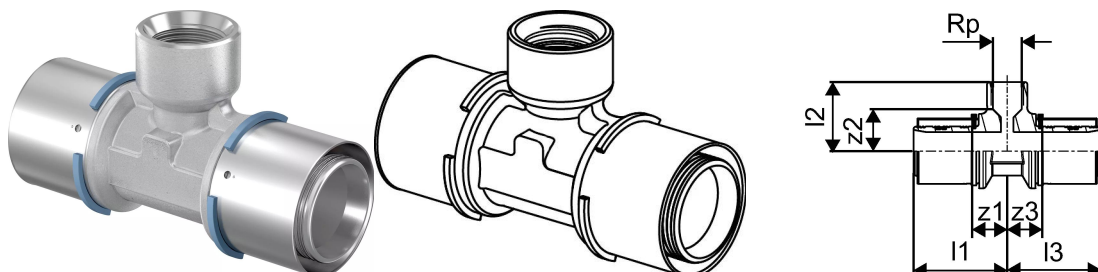

### Application information Uponor S-Press tee female thread

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press tee female thread 50-Rp1"FT-50

1046929

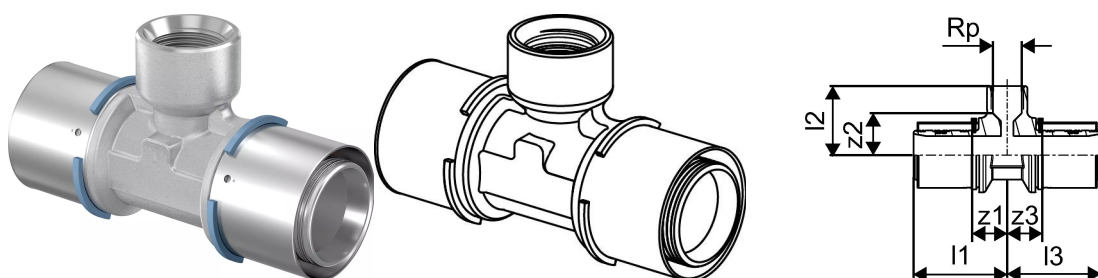

### Measurements

Female thread Rp	1
Length (l1)	71,5
Length (l2)	56
Length (l3)	71,5
z1	33,6
Z2	36,9
Z3	33,6

### Product code

Item no EAN	4021598114265
Item no GF	35001046929
Item no GTIN	04021598114265
Item no VVS	045478437

### Dimensions

Item Unit Height	50
Item Unit Length	145
Item Unit Weight	0,771
Item Unit Width	90
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905401659
Packaging GTIN PL4	06414905401666
Packaging Height PL1	110
Packaging Height PL4	584
Packaging Length PL1	205
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	240

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004059
Packaging Volume PL4	0,56064
Packaging Weight PL1	2,408
Packaging Weight PL4	192,64
Packaging Width PL1	180
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com