


Uponor S-Press adapter swivel nut 50-G2"SN

1046939

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

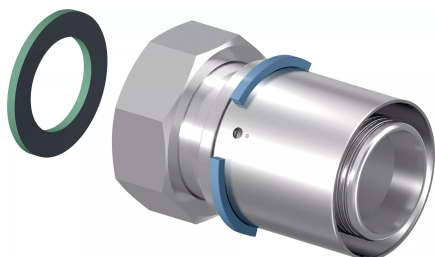

Application information Uponor S-Press adapter swivel nut

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press adapter swivel nut 50-G2"SN

1046939

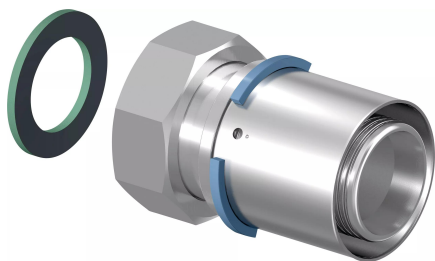

Measurements

Cylindric_thread_G	2
LENGTH_L	81,7
Length (l1)	12
Length (l2)	37,9
z1	31,8

Product code

Item no EAN	4021598114357
Item no GF	35001046939
Item no GTIN	04021598114357
Item no VVS	045483054

Dimensions

Item Unit Height	66
Item Unit Length	80
Item Unit Weight	0,497
Item Unit Width	66
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905401758
Packaging GTIN PL4	06414905401765
Packaging Height PL1	90
Packaging Height PL4	570
Packaging Length PL1	175
Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00212625
Packaging Volume PL4	0,4775232
Packaging Weight PL1	1,581
Packaging Weight PL4	303,533
Packaging Width PL1	135
Packaging Width PL4	748

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com