


Uponor Wipex RS adapter PN6 DR 63x5,8 RS2

1047013

- RS = unique modular fitting connection
- 6 bar, SDR 11
- DR = dezincification resistance brass

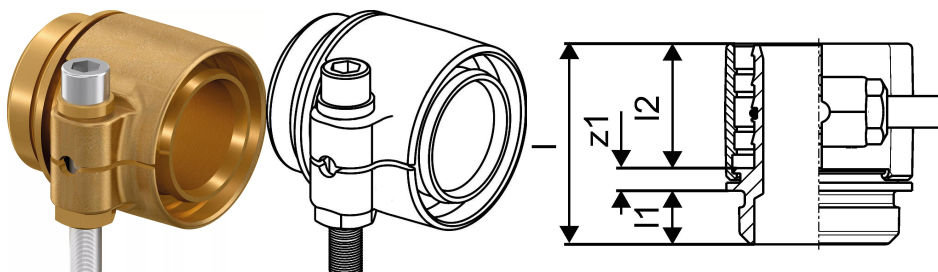

Application information Uponor Wipex RS adapter PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex RS adapter PN6 DR 63x5,8 RS2

1047013

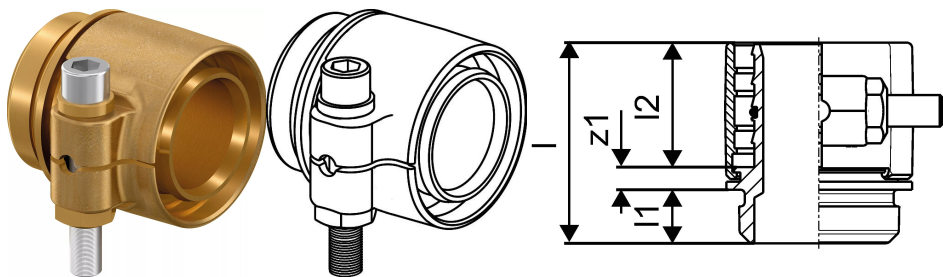

Status

Item Available Till date

2027-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598114791
Item no GF	35001047013
Item no GTIN	04021598114791

Dimensions

Item Unit Height	85
Item Unit Length	75
Item Unit Weight	0,929
Item Unit Width	19
Item_UOM	pce

Measurements

LENGTH_L	75
Length (l1)	46
Length (l2)	20
Wall thickness_s	5,8
z1	9

Packaging

Packaging GTIN PL1	06414905402137
Packaging GTIN PL4	06414905402144
Packaging Height PL1	102
Packaging Height PL4	548
Packaging Length PL1	154
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00180642
Packaging Volume PL4	0,52608
Packaging Weight PL1	1,179
Packaging Weight PL4	250,19
Packaging Width PL1	115
Packaging Width PL4	800

Documents

Page with all documents

↓

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com