
Product data sheet




GF Uponor RS flange adapter PN6 RS2-DN65 (PN6)

1059398

- Made of tin-plated DR brass (lead-free)
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

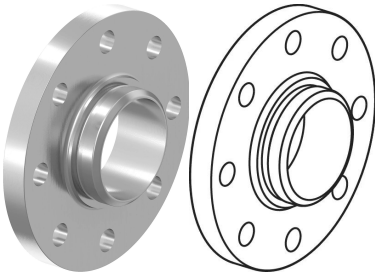

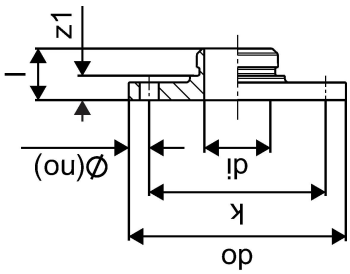

Application information GF Uponor RS flange adapter PN6

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor RS flange adapter PN6 RS2-DN65 (PN6)

1059398

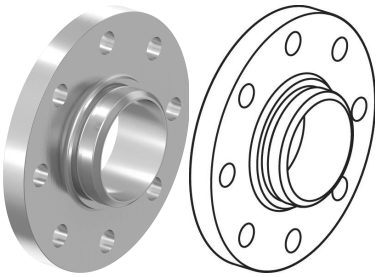

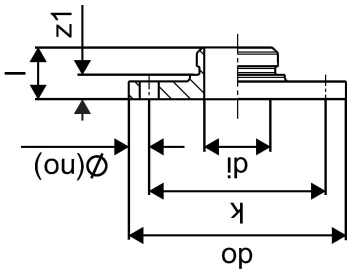

Measurements

Inner_diameter_di	48,7
LENGTH_L	38
Outer Diameter_do	160
Z Measurement k	130
z1	18

Product code

Item no EAN	4021598121706
Item no GF	35001059398
Item no GTIN	04021598121706
Item no NRF	5071281
Item no RSK	1897883

Dimensions

Item Unit Height	40
Item Unit Length	160
Item Unit Weight	1,2
Item Unit Width	160
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481385
Packaging GTIN PL4	06414905481392
Packaging Height PL1	60
Packaging Height PL4	700
Packaging Length PL1	215
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	144
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,002838
Packaging Volume PL4	0,672
Packaging Weight PL1	1,4
Packaging Weight PL4	197,8
Packaging Width PL1	220
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+